

AERA 3" CYLINDER

PENDANT WALL WASH

DIRECT/INDIRECT, DIRECT



Declare.



4" Height



8" Height



12" Height

True-to-size with a versatile minimalist esthetic, Aera Cylinder luminaires are high-performance fixtures, delivering visually comfortable lighting suitable for a wide range of applications.

Mounting Options



Flat



Conduit



Direct



Deep

Beam Angles



Low UGR < 10

Wall Wash 80°-Up

Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY
601 lm	10 W	43 lm/W
822 lm	14 W	59 lm/W
1135 lm	20 W	57 lm/W

¹ Lumen packages are assuming 3500K, 80+ CRI.

Light Source

Static White
Full Spectrum Static White
SOLA - Dim-to-Warm
DUO - Tunable White



COB

2 Step Color Binning
Up to 95+ CRI

Drivers / Protocols

1%, 0.1% Dimming Available
0-10V, TRIAC, ELV, Lutron EcoSystem, DALI, DMX
Emergency Battery (optional)



Smart / Wireless Compatible

Aera Family (Refer to other spec sheets)

Downlight



2" / 3" / 4"
Round / Square
Recessed Adjustable



2" / 3" / 4"
Round / Square
Recessed



2" / 3" / 4"
Round / Square
Recessed Wall Wash

Multi-aperture



2" / 3" / 4"
Round / Square
Recessed Adjustable



2" / 3" / 4"
Round / Square
Recessed



2" / 3" / 4"
Round / Square
Recessed Wall Wash

Cylinder



2" / 3" / 4" / 5" / 6"
4" Seal
Pendant
Pendant Asymmetric
Pendant Wall Wash



2" / 3" / 4" / 5" / 6"
4" Seal
Wall
Wall Asymmetric



2" / 3" / 4" / 5" / 6"
4" Seal
Surface
Surface Asymmetric
Surface Wall Wash

AERA 3" CYLINDER

PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT



Project: _____

Type: _____



For a Title 24 JA8 compliant fixture, see page 3.

Order Guide

LUMINAIRE ID ¹		DISTRIBUTION		CYLINDER HEIGHT		CYLINDER FINISH		BAFFLE STYLE		BAFFLE FINISH													
AE3CYPWW								WW															
AE3CYPWW - Aera 3" Cylinder Pendant Wall Wash ¹ Pendant (direct) and Pendant Asymmetric also available. Consult other spec sheet.	DI - Direct/Indirect D - Direct	DIRECT/INDIRECT ²		DIRECT		FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#		WW - Wall wash		FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#													
		8IN - 8" 12IN - 12"		4IN ³ - 4" 8IN - 8" 12IN - 12"																			
		CH#IN ⁴ - Custom height																					
		² Only available with DR canopy option when specified with integral drivers. ³ Not available with DMNC/DMRM canopy options when specified with integral drivers. ⁴ Specify height (#) in 1" increments only. Up to maximum 36". For minimum heights, see page 4.																					
LENS		LIGHT SOURCE		DIRECT BEAM		COLOR QUALITY		CRI		COLOR TEMPERATURE		VOLTAGE											
WW				WW																			
WW - Wall wash diffuser	SW - Static white FS - Full spectrum static white		WW - Wall wash		2STP ⁵ - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse ⁵ Not available with full spectrum.		80CRI ⁶ - 80+ CRI 90CRI ⁶ - 90+ CRI 95CRI - 95+ CRI ⁶ Not available with full spectrum.		22K ⁷ - 2200K 35K - 3500K 24K ⁸ - 2400K 40K - 4000K 27K - 2700K 50K ⁸ - 5000K 30K - 3000K ⁷ Only available with 90+ CRI. ⁸ Not available with 95+ CRI.		120V - 120V 277V - 277V UNV - 120V-277V 347V ⁹ - 347V ⁹ Only available with RD1 driver. Please consult factory.												
	SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control				3STP - 3 Step MacAdam Ellipse		90CRI - 90+ CRI		SOLA 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K														
DIRECT WATTAGE ¹⁰				INDIRECT WATTAGE ¹² Specify NA for Direct				DIMMING ¹³				ELECTRICAL											
10W - 10 W output, up to 601 lm 14W - 14 W output, up to 822 lm 20W ¹¹ - 20 W output, up to 1135 lm ¹⁰ Lumen outputs are reduced with full spectrum, consult factory. ¹¹ Not available for a Direct/Indirect fixture.				10W - 10 W output, up to 683 lm 14W - 14 W output, up to 939 lm NA - Not applicable ¹² Lumen outputs are reduced with full spectrum, consult factory.				INTEGRAL D1 - 1% 0-10V ELV ¹⁴ - ELV 120V TRI ¹⁴ - TRIAC 120V ¹³ PoE (Power-over- Ethernet) compatible. Consult factory for details. ¹⁴ Only available with 120V.				REMOTE ¹⁵ RD1 - 1% 0-10V RELV ¹⁶ - ELV 120V RTRI ¹⁶ - TRIAC 120V RLDE1 ¹⁷ - Lutron Hi-lume 1% Eco ¹⁵ A remote driver box is provided. ¹⁶ Only available with 120V. ¹⁷ On-site commissioning is required. ¹⁸ To specify, add +EB to the selected dimming option, e.g. RD1+EB.				1C - 1 circuit 2C ¹⁹ - 2 circuits ¹⁹ Only available with Direct/Indirect.							
SOLA 14W - 14 W output, up to 760 lm 18W ¹¹ - 18 W output, up to 1050 lm DUO 10W - 10 W output, up to 575 lm 14W - 18 W output, up to 805 lm 19W ¹¹ - 19 W output, up to 970 lm				SOLA 14W - 14 W output, up to 950 lm DUO 10W - 10 W output, up to 715 lm 14W - 14 W output, up to 1005 lm NA - Not applicable				SOLA SD1 - Single 0-10V input SELV ¹⁴ - ELV 120V STRI ¹⁴ - TRIAC 120V				SOLA RSD1 - Single 0-10V input RSELV ¹⁶ - ELV 120V RSTRI ¹⁶ - TRIAC 120V DUO RDMX ¹⁷ - DMX RDDA ¹⁷ - DALI DT6 RDDA8 ¹⁷ - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2 ¹⁷ - Lutron DALI-2 digital +EB ¹⁸ - Emergency battery											
CANOPY TYPE ²⁰				CANOPY FINISH				SUSPENSION ²⁶				OPTION ³⁰											
												NA											
FLR ^{21,22} - Flat round canopy, 4" octagonal junction box CDR ^{21,22} - Conduit feed, round canopy DMNC ^{21,23} - Direct mount, new construction DMRM ^{21,23,24} - Direct mount, remodel DR ²⁵ - Deep round canopy ²⁰ See page 6 for details. ²¹ Direct/Indirect requires a remote driver. ²² For 4" long cylinders, driver has to be in j-box when specified with integral drivers. See page 6 for details. ²³ 4" long cylinders require a remote driver. ²⁴ Single wiring entry only. No daisy chain connections allowed. ²⁵ Can accommodate up to 2 drivers.						FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#						BKS##IN - Matte black stem WHS##IN - Matte white stem BKSS##IN ²⁷ - Matte black swivel stem WHSS##IN ²⁷ - Matte white swivel stem BKFCSS##IN ²⁸ - Matte black field-cutttable stem WHFCS##IN ²⁸ - Matte white field-cutttable stem CF#S##IN ²⁹ - Custom finish stem CF#SS##IN ^{27,29} - Custom finish swivel stem CF#FCS##IN ^{28,29} - Custom finish field-cutttable stem ²⁶ Min 10" - max 72", specify length (##) in inches. ²⁷ Not available with DMNC/DMRM/DR canopy options, or for 4" long cylinders when specified with FLR/CDR and integral driver. ²⁸ Maximum 20" cylinder height. ²⁹ Specify RAL#.						NA - None ³⁰ To specify a JAB compliant fixture, see page 3.					

AERA 3" CYLINDER

PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT
Title 24 JA8



Project: _____
Type: _____



Order Guide

LUMINAIRE ID ¹	DISTRIBUTION	CYLINDER HEIGHT	CYLINDER FINISH	BAFFLE STYLE	BAFFLE FINISH
AE3CYPWW	D			WW	
AE3CYPWW - Aera 3" Cylinder Pendant Wall Wash ¹ Pendant (direct) and Pendant Asymmetric also available. Consult other spec sheet.	D - Direct	4IN ² - 4" 8IN - 8" 12IN - 12" CH#IN ³ - Custom height ² Not available with DMNC/DMRM canopy options when specified with integral drivers. ³ Specify height (#) in 1" increments only. Up to maximum 36". For minimum heights, see page 4.	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	WW - Wall wash	FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#

LENS	LIGHT SOURCE	DIRECT BEAM	COLOR QUALITY	CRI	COLOR TEMPERATURE	VOLTAGE
WW		WW		90CRI		
WW - Wall wash diffuser	SW - Static white SOLA - Dim-to-warm single channel control	WW - Wall wash	2STP - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse	90CRI - 90+ CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K SOLA ⁴ - Dim-to-warm single channel control ⁴ 3500K to 2200K	120V - 120V 277V - 277V UNV - 120V-277V

DIRECT WATTAGE	INDIRECT WATTAGE	DIMMING	ELECTRICAL
	NA		1C
10W - 10 W output, up to 601 lm 14W - 14 W output, up to 822 lm	NA - Not applicable	INTEGRAL D1 - 1% 0-10V ELV ⁵ - ELV 120V TRI ⁵ - TRIAC 120V ⁵ Only available with 120V. SD1 - Single 0-10V input SELV ⁵ - ELV 120V STRI ⁵ - TRIAC 120V	REMOTE ⁶ RD1 - 1% 0-10V RELV ⁷ - ELV 120V RTRI ⁷ - TRIAC 120V RLDE1 ⁸ - Lutron Hi-Lume 1% Eco ⁶ A remote driver box is provided. ⁷ Only available with 120V. ⁸ On-site commissioning is required. RSD1 - Single 0-10V input RSELV ⁷ - ELV 120V RSTRI ⁷ - TRIAC 120V
12W - 12 W output, up to 930 lm			1C - 1 circuit

CANOPY TYPE ⁹	CANOPY FINISH	SUSPENSION ¹⁴	OPTION
			JA8
FLR ¹⁰ - Flat round canopy, 4" octagonal junction box CDR ¹⁰ - Conduit feed, round canopy DMNC ¹¹ - Direct mount, new construction DMRM ^{11,12} - Direct mount, remodel DR ¹³ - Deep round canopy ⁹ See page 6 for details. ¹⁰ For 4" long cylinders, driver has to be in j-box when specified with integral drivers. See page 6 for details. ¹¹ 4" long cylinders require a remote driver. ¹² Single wiring entry only. No daisy chain connections allowed. ¹³ Can accommodate up to 2 drivers.	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	BKS##IN - Matte black stem WHS##IN - Matte white stem BKSS##IN ¹⁵ - Matte black swivel stem WHSS##IN ¹⁵ - Matte white swivel stem BKFCS##IN ¹⁶ - Matte black field-cutable stem WHFCS##IN ¹⁶ - Matte white field-cutable stem CF#S##IN ¹⁷ - Custom finish stem CF#SS##IN ^{15,17} - Custom finish swivel stem CF#FCS##IN ^{16,17} - Custom finish field-cutable stem ¹⁴ Min 10" - max 72", specify length (##) in inches. ¹⁵ Not available with DMNC/DMRM/DR canopy options, or for 4" long cylinders when specified with FLR/CDR and integral driver. ¹⁶ Maximum 20" cylinder height. ¹⁷ Specify RAL#.	JA8 - JA8 compliant

AERA 3" CYLINDER


PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT




Dimensions

CYLINDER

Direct/Indirect

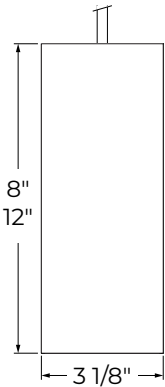

Direct

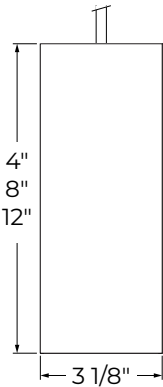


Minimum heights - Cylinder

Size	Distribution	Integral driver in cylinder	Integral driver in canopy or J-box	Remote driver
Ø 3"	Direct/Indirect	NA	8"	8"
	Direct	7"	4"	4"

*Consult factory for maximum heights.

BAFFLE

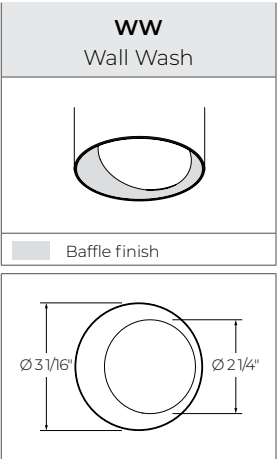


AERA 3" CYLINDER

PENDANT WALL WASH

DIRECT/INDIRECT, DIRECT




Finishes



FTMW - Matte white



FTMB - Matte black




FSPC - Satin silver



FSSPC - Matte silver



FCHP - Champagne



FDBZ - Dark bronze






AERA 3" CYLINDER






PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT



Mounting

CANOPY

INTEGRAL DRIVER						
Order code	FLR Flat round canopy, 4" octagonal junction box		CDR Conduit feed, round canopy	DMNC Direct mount, new construction	DMRM Direct mount, remodel	DR Deep round canopy
Canopy type						
Distribution	Direct					Direct/Indirect Direct
Canopy size	Ø 4 1/2" Height 3/8"		Ø 5 1/2" Height 1 15/16"	Ø 3 1/8" Height 2"		Ø 5 5/8" Height 1 3/8"
Suspension	Stem, Swivel stem ¹ , Field-cutttable stem ¹ Not available for 4" long cylinders specified with FLR/CDR.			Stem, Field-cutttable stem		
Min. height	4" (Driver in junction box) 8" (Driver in cylinder)			8"		D/I - 8" D - 4"
				Single wiring entry only. No daisy chain connections allowed.		D/I - 2 drivers in canopy D - 1 driver in canopy or cylinder

REMOTE DRIVER						
Order code	FLR Flat round canopy, 4" octagonal junction box		CDR Conduit feed, round canopy	DMNC Direct mount, new construction	DMRM Direct mount, remodel	DR Deep round canopy
Canopy type						
Distribution	Direct/Indirect Direct					
Canopy size	Ø 4 1/2" Height 3/8"		Ø 5 1/2" Height 1 15/16"	Ø 3 1/8" Height 2"		Ø 5 5/8" Height 1 3/8"
Suspension	Stem, Swivel stem, Field-cutttable stem			Stem, Field-cutttable stem		
Min. height	D/I - 8" D - 4"					
					Single wiring entry only. No daisy chain connections allowed.	

AERA 3" CYLINDER

PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT



SUSPENSION

STEM		
Stem	Swivel stem ^{1,2}	Field-cutable stem ³
Stem Lengths (*)		
Min 10" Max 72"	Min 10" Max 72" Max 45° tilt	Min 10" Max 72"
¹ Not available with DMNC/DMRM/DR canopy options, or for 4" long cylinders when specified with FLR/CDR and integral driver. ² The total stem length (*) includes the 1" swivel base located inside the canopy. ³ Maximum 20" cylinder height.		



AERA 3" CYLINDER


PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT



Color Quality

COLOR QUALITY - 3500K


TM-30 R _f	90
TM-30 R _g	100
CRI	90+
R9	> 50




Photometrics

WALL WASH

Values calculated based on 3500K and white wall wash baffle.



Wall Wash



80°
Uplight

Delivered lumens (LM)

	80+ CRI		90+ CRI		95+ CRI	
BEAM	WW	Uplight	WW	Uplight	WW	Uplight
10 W	601	683	562	683	433	491
14 W	822	939	768	877	591	675
20 W	1135	NA	1061	NA	817	NA

Efficacy (LM/W)

	80+ CRI		90+ CRI		95+ CRI	
BEAM	WW	Uplight	WW	Uplight	WW	Uplight
10 W	60	68	56	64	43	49
14 W	59	67	55	63	42	48
20 W	57	NA	53	NA	41	NA

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. CCT and baffle colors will change the lumen value.

CCT		BAFFLE COLOR	
2200K	0.80	White	1
2400K	0.87	Black	1
2700K	0.94		
3000K	0.98		
3500K	1		
4000K	1.05		
5000K	1.05		

For SOLA and DUO, please consult factory.

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\left(\frac{\text{DIRECT LM} + \text{UPLIGHT LM}}{\text{DIRECT W} + \text{UPLIGHT W}} \right) = \text{LPW}$$

AERA 3" CYLINDER

PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT




Photometrics

UNIFORMITY

Values calculated based on 3500K and white wall wash baffle.

24" from Wall - 36" Spacing

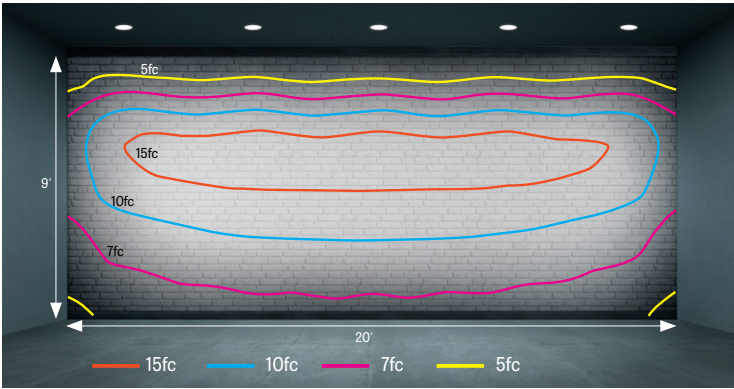

Foot-candles

FC ON WALL		24" FROM WALL - 24" SPACING			24" FROM WALL - 36" SPACING			24" FROM WALL - 48" SPACING		
ABOVE FINISHED FLOOR		80+ CRI	90+ CRI	95+ CRI	80+ CRI	90+ CRI	95+ CRI	80+ CRI	90+ CRI	95+ CRI
	9'	10	10	7	7	6	5	5	5	4
	8'	43	40	31	27	25	19	21	19	15
	7'	57	54	41	37	35	27	28	27	20
	6'	49	46	35	32	30	23	25	23	18
	5'	37	34	26	25	23	18	19	17	13
	4'	28	26	20	19	18	14	14	13	10
	3'	22	21	16	15	14	11	11	11	8
	2'	18	17	13	12	12	9	9	9	7
	1'	16	15	11	11	10	8	8	8	6



AERA 3" CYLINDER


PENDANT WALL WASH
DIRECT/INDIRECT, DIRECT



Technical Specifications

OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

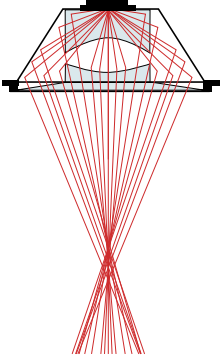

LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, and 5000K with a choice of 80+ CRI, 90+ CRI, or 95+ CRI, with elevated R9 value for 90+ CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency >84%, PF >0.9, THD <20%. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

Integral: 0-10V, ELV, TRIAC

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

Emergency battery option: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: Die-cast and extruded aluminum

Stem: Ø 1/2" rigid stem, swivel stem, and field-cutttable stem 10" to 72" standard length

Canopy: Flat, conduit feed, direct, and deep

Finish: Matte white, matte black, champagne, and dark bronze. Custom colors also available (provide RAL #). Satin silver and matte silver finishes are also available for Baffle.

Heat sink: Die-cast aluminum

Baffle: Die-cast aluminum

Baffle style: Wall Wash

AERA 3" CYLINDER

PENDANT WALL WASH

DIRECT/INDIRECT, DIRECT



WEIGHT

Direct/Indirect	Direct
8": 1.8 lbs - 0.8 kg	4": 1.4 lbs - 0.6 kg
12": 2.3 lbs - 1 kg	8": 2 lbs - 0.9 kg
	12": 2.4 lbs - 1.1 kg

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Title 24 JA8: California Building Standards Code

Declare: [LBC Red List Approved](#)

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.