


AERA 3" DEEP DOWNLIGHT

SQUARE RECESSED


NEW CONSTRUCTION & REMODEL



Aera Deep Prism
Flanged Trim



Aera Deep Smooth
Trimless



Aera Deep Smooth
Flanged Trim



3"

Aera Deep luminaires introduce a unique deep baffle feature to the Aera family, available with a prism or smooth texture. This depth allows for an exceptionally low glare quality of light and a visually quiet ceiling. Aera Deep comes in square or round models and 2" or 3" apertures. The high-performance family displays a precise coupling of optic and trim and can be installed as IC-rated, non-IC-rated, or Chicago Plenum-rated types.


Baffle Finish




Matte White



Matte Black



Matte Silver



Precision Specular

Beam Angles



10°



15°



25°



35°



50°

Low UGR < 10 in 10°, 15°, 25°, 35°, and 50° beams

Light Source

Static White

Full Spectrum
Static White

SOLA



DUO



Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY
1132 lm	10 W	113 lm/W
1545 lm	14 W	110 lm/W
2135 lm	20W	107 lm/W

¹ Lumen packages are assuming 3500K, 80+ CRI, 35° beam, with LSDL lens option.

Ceiling Types



Drywall



Millwork



Wood Slat
Consult factory



Acoustic Tile

Plenum Clearance

As low as 2 5/8"



Aera Downlight Family (Refer to other spec sheets)

Downlight



2" / 3" / 4"
Round / Square
Recessed Adjustable



2" / 3" / 4"
Round / Square
Recessed



2" / 3" / 4"
Round / Square
Recessed Wall Wash

Deep



2" / 3"
Round / Square
Recessed

Multi-aperture



2" / 3" / 4"
Round / Square
Recessed Adjustable



2" / 3" / 4"
Round / Square
Recessed



2" / 3" / 4"
Round / Square
Recessed Wall Wash

www.lumenwerx.com
T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



Lumenwerx reserves the right to modify
product specifications without notification.

AERA3-DEEP-DOWNLIGHT-SQUARE-RECESSED-SPEC-REV5 March 30, 2026

AERA 3" DEEP DOWNLIGHT SQUARE RECESSED NEW CONSTRUCTION & REMODEL



Project: _____

Type: _____

Order Guide

1 - Housing (Example: AE3DSR-TRM-SW-OF-ASB-120V-10W-D1)

LUMINAIRE ID ¹	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION ⁴
AE3DSR				
AE3DSR - Aera 3" Deep Square Recessed ¹ Round recessed also available. Consult other spec sheets.	TRM - Flanged trim TLMF - Trimless drywall mudplate TLMW ² - Trimless millwork ² For remodel (RM) installation type, TLMW adapter must be installed from above the ceiling or before ceiling is installed.	SW - Static white FS - Full spectrum static white SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control	OF - Open Frame Type Non-IC IC ³ - Type-IC RM - Remodel Type Non-IC CP ³ - Chicago Plenum Type-IC (CCEA) AT ³ - Airtight Type-IC ³ Only available with 14 W or less.	ASB ⁵ - Adjustable standard bar hangers FMB ⁵ - Flush mount bars ACB ⁵ - Adjustable commercial bar hangers AHC ⁵ - Adjustable hat channel bars NA - No bar hangers ⁴ See page 4 for more details. ⁵ Not available with RM installation type.
VOLTAGE	WATTAGE ⁷	DIMMING ⁹		
120V - 120V 277V - 277V UNV - 120V-277V 347V ⁶ - 347V ⁶ Only available with RD1 driver. Please consult factory.	10W - 10 W output, up to 1132 lm 14W - 14 W output, up to 1545 lm 20W ⁸ - 20 W output, up to 2135 lm ⁷ Lumen outputs are reduced with full spectrum, consult factory. ⁸ Not available with IC/CP/AT. SOLA ⁸ 14W - 14 W output, up to 950 lm 18W - 18 W output, up to 1205 lm DUO ⁸ 14W - 14 W output, up to 1005 lm 19W - 19 W output, up to 1355 lm	INTEGRAL D1 - 1% 0-10V ELV ¹⁰ - ELV 120V TRI ¹⁰ - TRIAC 120V DA ^{11,12} - DALI ELD1 ¹¹ - eldoLED 1% ECOdrive 0-10V ELDO ¹¹ - eldoLED 0.1% SOLOdrive 0-10V PEQO ^{12,13} - Lutron Hi-lume Premier 0.1% EcoSystem ⁹ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁰ Only available with 120V. ¹¹ Not available with RM installation type. ¹² On-site commissioning is required. ¹³ Only available with OF installation type. SOLA SD1 - Single 0-10V input SELV ¹⁰ - ELV 120V STRI ¹⁰ - TRIAC 120V DUO ¹¹ DD1 - Dual 0-10V input for CCT/intensity	REMOTE ¹⁴ RD1 - 1% 0-10V RELV ¹⁵ - ELV 120V RTRI ¹⁵ - TRIAC 120V RLDE1 ¹⁶ - Lutron Hi-lume 1% Eco RDA ¹⁶ - DALI ¹⁴ A remote driver box is provided. ¹⁵ Only available with 120V. ¹⁶ On-site commissioning is required. ¹⁷ To specify, add +EB to the selected dimming option, e.g. RD1+EB. SOLA RSD1 - Single 0-10V input RSELV ¹⁵ - ELV 120V RSTRI ¹⁵ - TRIAC 120V DUO RDMX ¹⁶ - DMX RDDA ¹⁶ - DALI DT6 RDDA8 ¹⁶ - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RDL2 ¹⁶ - Lutron DALI-2 digital +EB ¹⁷ - Emergency battery	RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V RPEQO ¹⁶ - Lutron Hi-lume Premier 0.1% EcoSystem +EB ¹⁷ - Emergency battery

2 - Light & Baffle (Example: AE3DPSRB-SW-10W-15DEG-2STP-90CRI-27K-LSDL-TRM-FMWH-FMWH)

LUMINAIRE ID	LIGHT SOURCE	WATTAGE ¹⁸	BEAM	COLOR QUALITY	CRI
	Specify same as Housing	Specify same as Housing			
AE3DPSRB - Aera 3" Deep Prism Square Recessed AE3DSSRB - Aera 3" Deep Smooth Square Recessed	SW - Static white FS - Full spectrum static white SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control	10W - 10 W output, up to 1132 lm 14W - 14 W output, up to 1545 lm 20W ¹⁹ - 20 W output, up to 2135 lm ¹⁸ Lumen outputs are reduced with full spectrum, consult factory. ¹⁹ Not available with IC/CP/AT. SOLA ¹⁹ 14W - 14 W output, up to 950 lm 18W - 18 W output, up to 1205 lm DUO ¹⁹ 14W - 14 W output, up to 1005 lm 19W - 19 W output, up to 1355 lm	10DEG - 10° Very narrow spot 15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood 25DEG - 25° Spot 35DEG - 35° Narrow flood 60DEG - 60° Wide flood	2STP ²⁰ - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse ²⁰ Not available with full spectrum. 3STP - 3 Step MacAdam Ellipse	<u>Static white</u> 80CRI - 80+ CRI 90CRI - 90+ CRI 95CRI - 95+ CRI <u>Full spectrum</u> 95CRI - 95+ CRI 90CRI - 90+ CRI
COLOR TEMPERATURE	ACCESSORY	TRIM STYLE	BAFFLE FINISH	TRIM FLANGE FINISH	
	See page 5 for details	Specify same as Housing		Specify NA for Trimless	
22K ²¹ - 2200K 24K ²¹ - 2400K 27K - 2700K 30K - 3000K ²¹ Not available with 95+ CRI. SOLA 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K	At light element LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens	TRM - Flanged trim TLMF - Trimless drywall mudplate TLMW ²² - Trimless millwork ²² For remodel (RM) installation type, TLMW adapter must be installed from above the ceiling or before ceiling is installed.	FMWH - Matte white FMBK - Matte black FMSL - Matte silver FPSPC - Precision specular	FMWH - Matte white FMBK - Matte black NA - Not applicable	

AERA 3" DEEP DOWNLIGHT SQUARE RECESSED NEW CONSTRUCTION & REMODEL




Housing

INSTALLATION TYPES		
OF - Open Frame Type Non-IC	IC - Type-IC	CP - Chicago Plenum Type-IC (CCEA) AT - Airtight Type-IC
RM - Remodel Type Non-IC		
Integral	Remote	

- For height dimension C, see the PLENUM CLEARANCE & CUT-OUT DIMENSIONS table below.
- For OF, IC, CP, and AT installation types with remote dimming, a remote driver box is provided.
- Clearance between sides of luminaire and parts of building must be 1/2" minimum; clearance to insulating materials to be 3" minimum, unless luminaires are IC rated.

PLENUM CLEARANCE & CUT-OUT DIMENSIONS

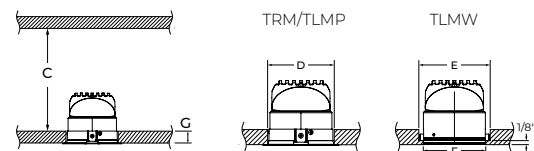

		PLENUM CLEARANCE HEIGHT	
		REMOTE & INTEGRAL	
		D1/ELV/TRI	LDE1/DA /ELD1/ELDO/PEQ0
C	OF	2 5/8" (FMB) 4 1/8"	6"
	IC	2 5/8" (10 W - FMB) 4" (10 W - ASB, ACB, AHC) 4" (14 W) 6 3/8" (20 W)	6 3/8"
	CP /AT	4 7/8" (14 W) 6 7/8" (20 W)	6 7/8"
	RM	4 1/8"	NA
		CUT-OUT DIMENSIONS	
D	TRM/ TLMP	3 1/2" x 3 1/2"	
E	TLMW	3 1/2" x 3 1/2"	
F		3 1/16" x 3 1/16" with 1/8" lip	
		MAXIMUM CEILING THICKNESS	
G	TRM/ TLMP	1 3/8"	
	TLMW	5/8"	

AERA 3" DEEP DOWNLIGHT

SQUARE RECESSED


NEW CONSTRUCTION & REMODEL



Housing


MOUNTING OPTIONS

ASB - Adjustable Standard Bar Hangers

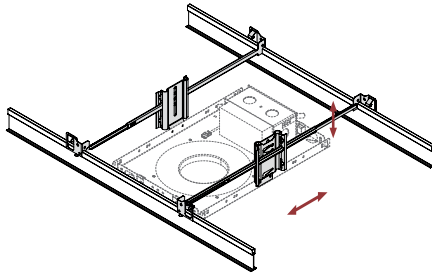


Adjustable Standard Bar hangers can be used in both commercial and residential applications and are adjustable to various heights in both Grid Ceiling and Drywall mounting. ASB hangers are less rigid and versatile than ACB hangers.

FMB - Flush Mount Bars

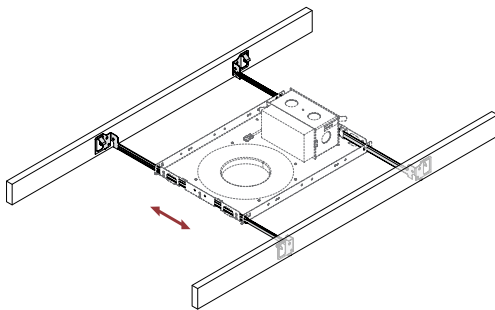

Flush Mount Bars are best used in residential applications, fitting snug to the surface and suitable for Wood, Metal, and Drywall mounting. The flush mounted bars are static and can't be adjusted.


ACB - Adjustable Commercial Bar Hangers

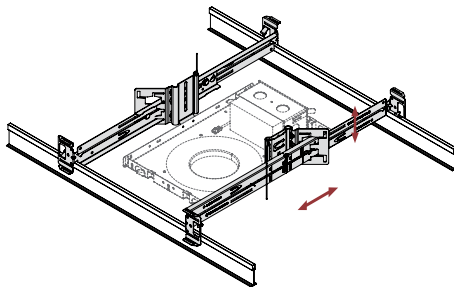

Adjustable Commercial Bar hangers can be used in both commercial and residential applications and are by far the most versatile mounting bar we offer with its adjustability to various heights. ACB hangers are suitable for Grid Ceiling, Drywall, Metal, Wood and Frame mounting.

- Extremely rigid
- Fits into C-Channel notches in a Butterfly Bracket

AHC - Adjustable Hat Channel Bars

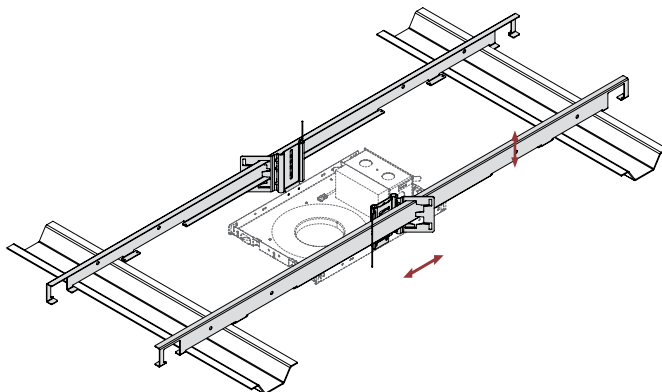

Adjustable Hat Channel bars can be used in both commercial and residential applications and come with a butterfly clip to adjust to various heights. AHC bars can be hung downward by 90 degrees in vertical position, and once wired, can be shifted onto the horizontal mounting plane. AHC bars are suitable for both Drywall and wood ceiling applications.


AERA 3" DEEP DOWNLIGHT

SQUARE RECESSED

NEW CONSTRUCTION & REMODEL



Light & Baffle

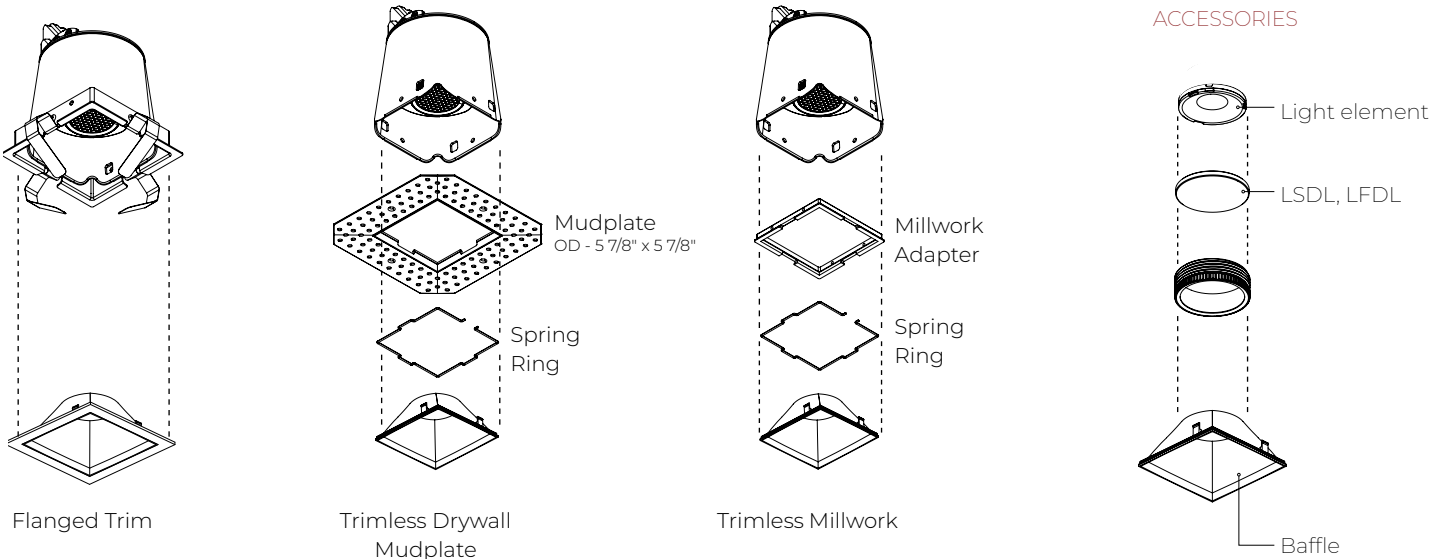

TRM Flanged Trim	TLMP/TLMW Trimless Drywall Mudplate /Trimless Millwork
Baffle finish Trim flange finish	



AERA 3" DEEP DOWNLIGHT

SQUARE RECESSED


NEW CONSTRUCTION & REMODEL



Color Quality

COLOR QUALITY - 3500K


TM-30 Rf	90
TM-30 Rg	100
CRI	90+
R9	> 50




Photometrics

STATIC WHITE


Values calculated based on 3500K, matte white baffle, and LSDL lens option.




10°




15°



25°



35°



50°

Delivered lumens (LM)

CRI	80+ CRI					90+ CRI					95+ CRI				
BEAM	10°	15°	25°	35°	50°	10°	15°	25°	35°	50°	10°	15°	25°	35°	50°
10 W	950	1056	1127	1132	1003	888	987	1053	1058	937	684	760	811	815	721
14 W	1297	1441	1539	1545	1370	1212	1347	1438	1444	1280	933	1037	1107	1112	986
20 W	1792	1991	2125	2135	1892	1675	1861	1986	1995	1768	1290	1433	1529	1536	1361

Efficacy (LM/W)

CRI	80+ CRI					90+ CRI					95+ CRI				
BEAM	10°	15°	25°	35°	50°	10°	15°	25°	35°	50°	10°	15°	25°	35°	50°
10 W	95	106	113	113	100	89	99	105	106	94	68	76	81	81	72
14 W	93	103	110	110	98	87	96	103	103	91	67	74	79	79	70
20 W	90	100	106	107	95	84	93	99	100	88	64	72	76	77	68

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, trim styles, baffle colors and accessories will change the lumen value.

CCT		TRIM STYLE		BAFFLE FINISH		ACCESSORIES * (At light element)	
2200K	0.80	Flanged trim	1	Matte white	1	LSDL - Soft diffused lens, Solite	1
2400K	0.87	Trimless	1	Matte black	0.95	LFDL - Frosted lens	0.8
2700K	0.94			Matte silver	0.98		
3000K	0.98			Precision specular	1		
3500K	1						
4000K	1.05						
5000K	1.05						

For SOLA and DUO, please consult factory.

www.lumenwerx.com
T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



Lumenwerx reserves the right to modify product specifications without notification.

AERA3-DEEP-DOWNLIGHT-SQUARE-RECESSED-SPEC-REV5 March 30, 2026


AERA 3" DEEP DOWNLIGHT SQUARE RECESSED NEW CONSTRUCTION & REMODEL



Technical Specifications

OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

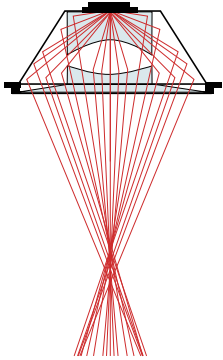

LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, and 5000K with a choice of 80+ CRI, 90+ CRI, or 95+ CRI, with elevated R9 value for 90+ CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency >84%, PF >0.9, THD <20%. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

Integral: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

Emergency battery options: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing

For new construction, 20 gauge powder coated steel. Open frame, type-IC, or Chicago Plenum (CCEA) rated. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable standard, flush mount, adjustable commercial, and adjustable hat channel bar hangers are available as mounting options.

AERA 3" DEEP DOWNLIGHT

SQUARE RECESSED

NEW CONSTRUCTION & REMODEL



Light element

LED module: Integral COB module. 90+ CRI and 2 SDCM, Standard with options of 80+ CRI, or 95+ CRI. L80 > 60,000 hours.

XPoint™ Refraction Technology optic: Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

Thermal management: Die-cast aluminum heat sink to maximize thermal dissipation.

Baffle: Polycarbonate plastic with integrated clips

Trim style: Trimmed and trimless with mudplate or millwork adapter

WEIGHT

Open frame: 4.3 lbs - 1.9 kg

Type-IC: 4.5 lbs - 2.0 kg

Chicago Plenum: 7.5 lbs - 3.4 kg

Remodel: 3.25 lbs - 1.5 kg

ACCESSORIES



Soft diffused
lens, Solite



Frosted
diffused lens

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Chicago Plenum: City of Chicago approved (CCEA) when specified with CP installation type option.

IC rated: Suitable for direct contact with insulation when specified with IC, CP or AT installation type options.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.