


CURVIA SLIM SEAL 1

RING



PENDANT - RECESSED - SURFACE

SEALWERX SERIES

Lumenwerx

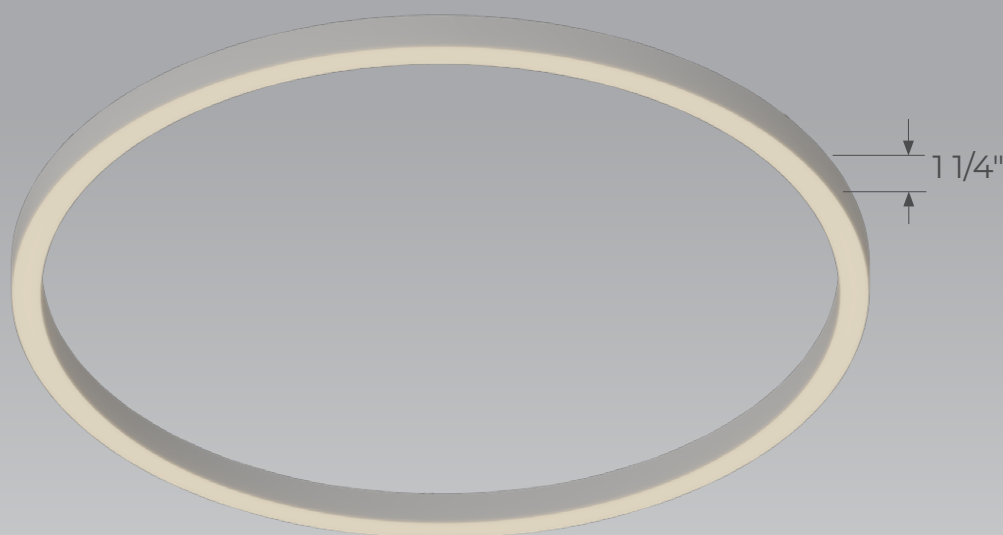

At just 1.25" tall and available in 1" and 2" widths, Curvia Slim Seal carries forward the curvilinear design language of Curvia Slim while adding sealed protection. Offered with three standard radii, 90° corners, and two endcap options, it enables the same arcs, rings, and patterns with an equally sleek profile. With IP54 and IP64 ratings, Slim Seal safeguards performance against dust and moisture, making it ideal for healthcare, hospitality, food service, and outdoor applications.



Curvia Slim Brochure

Curvia Family (Refer to other spec sheets)

Curvia Mini

1"



Ring

Curvia Slim

1", 2"



Ring
Shapes
Pattern

Curvia Slim Seal

1", 2"



Ring
Shapes
Pattern

Curvia Prism

2"



Ring
Shapes
Pattern

Curvia

2", 3", 4"



Ring
Shapes
Pattern

Curvia XYZ

2", 3"



Pattern

Curvia Horizon

2", 3"



Ring
Shapes

Curvia Perimeter

2", 3", 4", 5"



Pattern

Curvia Seal Perimeter

2", 3", 4"



Pattern

Curvia Seal

2", 3", 4"



Ring
Shapes
Pattern

Curvia Acoustix

2"



Ring
Shapes
Pattern

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9

T (514) 225-4304 F (514) 931-4862

www.lumenwerx.com



Lumenwerx reserves the right to modify product specifications without notification.

© Lumenwerx, ULC. All rights reserved.

CURVIA-SLIM-SEAL-1-RING-SPEC-REV1 June 26, 2026

CURVIA SLIM SEAL 1

RING

PENDANT - RECESSED - SURFACE

SEALWERX SERIES



Project: _____

Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	ENVIRONMENT ^{1,2}	SIZE ³	OPTIC
	D			EPDO
CURVSLIMSEALIRIP - Curvia Slim Seal 1" Ring Pendant CURVSLIMSEALIRIR - Curvia Slim Seal 1" Ring Recessed CURVSLIMSEALIRIS - Curvia Slim Seal 1" Ring Surface	D - Direct	IP64 - IP64-Rated IP54 - IP54-Rated ¹ See page 5 for more information on the features and installation details for each environment option. ² Fixture must be installed with direct lens facing down.	2FT - Ø 2' 3FT - Ø 3' 4FT - Ø 4' ³ Dimensions are referenced to fixture centerline. See page 4 for actual dimensions.	EPDO - Environmentally Protected Direct Optic

LIGHT SOURCE	CRI	LUMEN PACKAGE ⁴	COLOR TEMPERATURE	VOLTAGE
SW				
SW - Static white	80CRI - 80+ CRI 90CRI - 90+ CRI	350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft ⁴ To calculate the total lumens, multiply the lumen package (lm/ft) by the circumference of the ring (diameter x π).	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	120V - 120V 277V - 277V UNV - 120V-277V 347V ⁵ - 347V ⁵ Only available with RD1 driver.

DRIVER ⁶	ELECTRICAL
REMOTE RD1 - 1% 0-10V RELV ⁷ - ELV 120V RTRI ⁷ - TRIAC 120V RDA ⁸ - DALI RLDE1 ⁸ - Lutron Hi-lume 1% Eco RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V RLTD10 - Low-temperature 10% 0-10V ⁶ See page 5 for driver temperature ranges. ⁷ Only available with 120V. ⁸ On-site commissioning is required.	1C - 1 circuit EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{9,10} - Generator transfer device fixture ⁹ Not available with 347V. ¹⁰ Not available for environments where the ambient temperature falls below 0°C (32°F). ¹¹ Not available with EC or GTD. To specify, add +EMB(FL) to the selected electrical option, e.g. 1C+EMB(FL).
	<u>Emergency battery option</u> ^{9,10,11} +EMB(FL) - Emergency battery, fully lit

MOUNTING ¹²	FINISH	WIRE HARNESS LENGTH ¹⁴ Specify NA for Pendant	OPTION
PENDANT ¹³ SSTS - Stem, standard SSTC() - Stem, custom ¹² The mounting option selected must reflect the luminaire ID. ¹³ Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options.	RECESSED DTR - Trim DMF - Drywall mud flange SURFACE GSM - Gasketed surface mount	W - Matte white B - Matte black AL - Aluminum WA - White antimicrobial Silverwerx CF# - Custom finish, specify RAL# ¹⁴ Low-voltage, plenum-rated wire harness for remote driver.	10FT - 10' 20FT - 20' 30FT - 30' 50FT - 50' 70FT - 70' 90FT - 90' NA - Not applicable ¹⁵ Only available with IP64 environment option.

CURVIA SLIM SEAL 1

RING

PENDANT - RECESSED - SURFACE

SEALWERX SERIES



Pendant Mounting Code

Stem

Standard

SSTS - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable

Custom

Example: SSTC(5NPC-36IN-W-STW-PCW-SLS)

SSTC() - Stem, custom

NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	POWER CORD COLOR	OPTION
5NPC - Ø 5" non-power canopy	18IN - 18" 36IN - 36" #IN ² - Specify length in inches ² Minimum length is 6". Maximum length is 72". Stem is not field adjustable.	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STW - Matte white STAL - Aluminum STB - Matte black STCF# - Custom finish, specify RAL#	PCW - White PCB - Black	SLS - Sloped ceiling for stem NA - None

CURVIA SLIM SEAL 1

RING


PENDANT - RECESSED - SURFACE



SEALWERX SERIES


Dimensions

PENDANT




Nominal Diameter (FT)	Centerline diameter (IN)
2	24
3	36
4	48

RECESSED

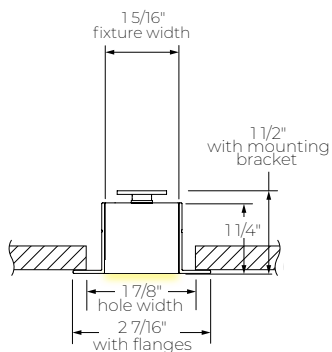


TRIM

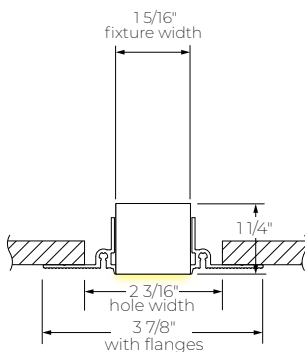

DRYWALL MUD FLANGE

SURFACE

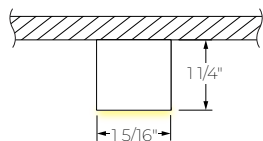

GASKETED SURFACE MOUNT

CURVIA SLIM SEAL 1





RING

PENDANT - RECESSED - SURFACE

SEALWERX SERIES



Environment Options

Direct			
IP64		IP54	
Dust tight	Water splash resistance	Dust protected	Water splash resistance
OUTDOOR			
Moderate exposure to the elements		Under canopy, slightly exposed	
INDOOR			
Wipe down application Healthcare application			
			
Joiner gasket every 8'		Continuous line of light over 8'	
			

Ambient Temperature Range

based on driver selection

	RLDE1	RELV / RTRI	RDA / RELD1 / RELDO	RD1	RLTD10
Minimum temperature:	0 °C / 32 °F	-10 °C / 14 °F	-20 °C / -4 °F	-30 °C / -22 °F	-40 °C / -40 °F
Maximum temperature:	40 °C / 104 °F				

CURVIA SLIM SEAL 1

RING

PENDANT - RECESSED - SURFACE

SEALWERX SERIES



Photometrics

Values calculated based on a 4' fixture at 3500K.



LM/FT	W/FT	LM/W
350	3.4	103
500	4.8	104
750	7.1	106

MULTIPLIER TABLE

Use this table to get results for different color temperatures.

CCT	WATTS	LPW
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI
2700K	1.02	0.98
3000K	1.00	1.00
3500K	1.00	1.00
4000K	0.97	1.03
5000K	0.97	1.03

CURVIA SLIM SEAL 1

RING

PENDANT - RECESSED - SURFACE

SEALWERX SERIES



Technical Specifications

OPTIC

Environmentally Protected Direct Optic (EPDO)

The Environmentally Protected Optic features an innovative sealed design with our exclusive Supreme Grip™ Technology and advanced gasketing, ensuring a precise, secure fit on the extrusion while delivering superior protection against dust, water, and UV distortion.

LIGHT SOURCE

Custom array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection. An optional low-temperature 10% 0-10V driver, suitable for temperatures down to -40°C/F is also available.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

Battery

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours. Suited for ambient temperatures of 0°C (32°F) to 55°C (131°F).

Generator Transfer Device (GTD)

A UL924 listed shunt relay that can bypass both line voltage (120-277V) and 0-10V dimming signal. Suited for ambient temperatures of 0°C (32°F) to 60°C (140°F).

MOUNTING

Pendant: Pendant fixtures can be mounted with stem.

Recessed: Recessed fixtures can be mounted in ceilings with trim or mud flange options.

Surface: Surface fixtures can be mounted directly to hard surface ceilings, hardware supplied by others. A minimum of 6" from the vertical wall is required.

FINISH

Interior: 95% reflective matte powder coated white paint

Exterior: Powder-coat paint in matte white, matte black, or aluminum. Custom finishes are also available. Optional antimicrobial finish.

CONSTRUCTION

Housing: Extruded aluminum

Reflectors: Aluminum

Lens: Polycarbonate

Gaskets: closed-cell silicone foam

Stem: Ø 1/2" threaded steel tube

WEIGHT

Pendant: 0.57 lb/ft - 0.26 kg/ft

Recessed: 0.93 lb/ft - 0.42 kg/ft

Surface: 0.57 lb/ft - 0.26 kg/ft

CERTIFICATION

ETL: IP54-Rated environment option is rated for dry/damp locations. IP64-Rated environment option is ETL Wet Listed. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. During the installation of Wet Listed fixtures, the contractor is responsible for properly sealing all mounting and electrical connection points.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.