


CURVIA 2 ACOUSTIX

RING
PENDANT

 **Lumenwerx**

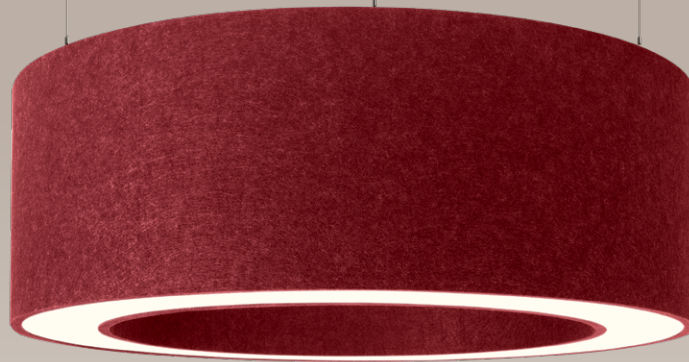

Curvia Acoustix luminaires masterfully balance quality lighting with effective sound control through our acoustic felt, crafted from recycled plastic bottles. Available in over 30 colors, this felt not only reduces ambient noise but can also serve as a prominent design element in creating complete, unique acoustic lighting solutions.

SENSORS
For latest
information
on sensors,
click [here](#).



Curvia Acoustix
Brochure



Curvia Additions
Brochure

Curvia Family (Refer to other spec sheets)

Curvia Mini

1"



Ring

Curvia Slim

1", 2"



Ring
Shapes
Pattern

Curvia Slim Seal

1", 2"



Ring
Shapes
Pattern

Curvia Prism

2"



Ring
Shapes
Pattern

Curvia

2", 3", 4"



Ring
Shapes
Pattern

Curvia XYZ

2", 3"



Pattern

Curvia Horizon

2", 3"



Ring
Shapes

Curvia Perimeter

2", 3", 4", 5"



Pattern

Curvia Seal Perimeter

2", 3", 4"



Pattern

Curvia Seal

2", 3", 4"



Ring
Shapes
Pattern

Curvia Acoustix

2"



Ring
Shapes
Pattern

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931-4862

www.lumenwerx.com



Lumenwerx reserves the right to modify
product specifications without notification.

© Lumenwerx, ULC. All rights reserved.

CURVIA2-ACOUSTIX-RING-SPEC-REV1 May 8, 2026

CURVIA 2 ACOUSTIX

RING

PENDANT



Project: _____

Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	LUMINAIRE HEIGHT	SIZE ^{2,3}	DIRECT OPTIC	INDIRECT OPTIC Specify NA for Direct fixture	LIGHT SOURCE ⁶
CURV2ACORP						
CURV2ACORP - Curvia 2" Acoustix Ring Pendant	DI - Direct/Indirect D - Direct	8IN ¹ - 8" 12IN - 12" 16IN - 16" ¹ Not available with Direct/Indirect.	2FT - Ø 2' 3FT - Ø 3' 4FT - Ø 4' 5FT - Ø 5' 6FT - Ø 6' ² Dimensions are referenced to fixture centerline. See page 4 for actual dimensions. ³ 8' And over will be shipped in separate pieces. ⁴ Minimum Ø 2'.	8FT - Ø 8' 10FT - Ø 10' 12FT - Ø 12' #FT ⁴ - Custom, specify diameter (#) ⁵ Direction of light must be indicated on RCP/lighting plans.	HLO - High-Efficiency Lambertian Optic AOO ⁵ - Asymmetric Opal Optic	HLO - High-Efficiency Lambertian Optic NA - Not applicable ⁶ Chromawerx SOLA, DUO, and QUADRO also available. Consult factory.

CRI	DIRECT LUMEN PACKAGE ⁹	INDIRECT LUMEN PACKAGE Specify NA for Direct fixture	COLOR TEMP.	VOLTAGE	DRIVER ¹¹
80CRI ⁷ - 80+ CRI 90CRI ⁷ - 90+ CRI 95CRI ⁸ - 95+ CRI	350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft ⁹ To calculate the total lumens, multiply the lumen package (lm/ft) by the circumference of the ring (diameter x π).	350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft NA - Not applicable	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁰ - 347V ¹⁰ Only available with D1 driver. Minimum Ø 7" fixture for integral drivers.	D1 - 1% 0-10V ELV ¹² - ELV 120V TRI ¹² - TRIAC 120V DA ¹³ - DALI LDE1 ¹³ - Lutron Hi-Lume 1% Eco ELD1 - eldoLED 1% ECODrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ¹¹ Integral or remote subject to factory evaluation. Code will be updated with prefix "R" if factory determines driver to be remote. ¹² Only available with 120V. ¹³ On-site commissioning is required.

ELECTRICAL	MOUNTING
1C - 1 circuit 2C ¹⁴ - 2 circuits EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{15,16} - Generator transfer device fixture ¹⁴ Available for Direct/Indirect only. Separate direct and indirect circuits. ¹⁵ Integral or remote subject to factory evaluation. GTD/EMB must be housed with the driver. ¹⁶ Not available with 347V. ¹⁷ The battery is always remote and powers the direct LEDs. ¹⁸ Not available with EC or GTD. To specify, add +EMB() to the selected electrical option and specify the lighting configuration desired, e.g. 1C+EMB(FL). ¹⁹ Only available with Ø 2' to Ø 4'. ²⁰ Only available with Ø 5' and bigger. For Ø 5' to Ø 6', fixture will be half lit. For Ø 7' to Ø 9', fixture will be third lit. For Ø 10' to Ø 12', fixture will be quarter lit.	Emergency battery option ^{15,16,17,18} +EMB(FL) ¹⁹ - Emergency battery, fully lit +EMB(SL) ²⁰ - Emergency battery, section lit PENDANT ²¹ Single canopy ^{22,23} SRACS - Single round canopy, aircraft cable, standard SRACC() - Single round canopy, aircraft cable, custom Multiple canopies ²⁴ ACS - Aircraft cable, standard STS - Stem, standard ACC() - Aircraft cable, custom STC() - Stem, custom ²¹ Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options. ²² Only available up to Ø 4'. ²³ The minimum required mounting heights (distance from ceiling to top of fixture in inches) are: Ø 2' - min 15" Ø 3' - min. 22" Ø 4' - min. 29". ²⁴ 4 Canopies or more provided.

FINISH	FELT COLOR	OPTIONS ²⁸
W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STANDARD COLORS  FWN  FON  ION  TBN  MDN  LVN  LEN  CYN  PMN  FGN PREMIUM COLORS ^{25, 26}  PKN  OGN  LNN  LMN  EGN ²⁷  CDN  LCN ²⁷  SYN  BLN  NVN  IVN  SLN  CNN  GHN  CLN ²⁷  BHN  CFN ²⁷  GRN ²⁷  MON  ESN ²⁷ FU120 - Fuse 120V FU277 - Fuse 277V CTB9 ²⁹ - T-bar caddy clip, 9/16" CTB15 ²⁹ - T-bar caddy clip, 15/16" CTG9 ²⁹ - Tegular caddy clip, 9/16" CTG15 ²⁹ - Tegular caddy clip, 15/16" CST ²⁹ - Screw slot caddy clip NA - None ²⁸ Separate codes with a "+" if more than one is specified. ²⁹ Only available with aircraft cable.	

CURVIA 2 ACOUSTIX

RING

PENDANT



Pendant Mounting Code

Aircraft Cable - single canopy

Standard

SRACS - Single round canopy, aircraft cable, standard

- Ø 5" round single canopy with 4 cables
- Canopy is black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Aircraft cable length is 48"

Custom

SRACC() - Single round canopy, aircraft cable, custom

CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR
5PC - Ø 5" power canopy	48IN - 48" 72IN - 72" 120IN - 120" #IN ¹ - Other lengths, specify in inches ¹ Maximum length is 288". For longer lengths, please consult factory.	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	PCW - White PCB - Black

Example: SRACC(5PC-72IN-W-PCB)

Aircraft Cable - multiple canopies

Standard

ACS - Aircraft cable, standard

- Ø 5" for power canopy
- Ø 3" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Aircraft cable length is 36"

Custom

ACC() - Aircraft cable, custom

NON-POWER CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR	OPTION
3NPC - Ø 3" non-power canopy 5NPC - Ø 5" non-power canopy	36IN - 36" 72IN - 72" 120IN - 120" #IN ¹ - Other lengths, specify in inches ¹ Maximum length is 288". For longer lengths, please consult factory.	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	PCW - White PCB - Black	SEM ² - Seismic mounting SLS ² - Sloped ceiling for aircraft cable NA - None ² Not available with the Ø 3" non-power canopy size.

Example: ACC(3NPC-72IN-W-PCB-NA)

Stem

Standard

STS - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable

Custom

STC() - Stem, custom

NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTION
5NPC - Ø 5" non-power canopy	18IN - 18" 36IN - 36" #IN ¹ - Specify length in inches ¹ Minimum length is 6". Maximum length is 72". Stem is not field adjustable.	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STW - Matte white STAL - Aluminum STB - Matte black STCF# - Custom finish, specify RAL#	SLS - Sloped ceiling for stem NA - None

Example: STC(5NPC-36IN-W-STW-SLS)


CURVIA 2 ACOUSTIX

RING

PENDANT




Dimensions

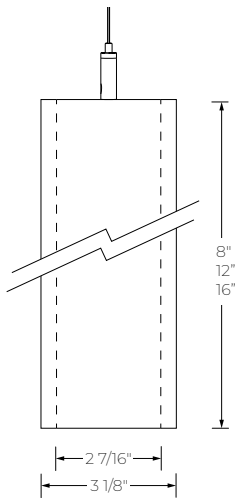


Nominal Diameter (FT)	Centerline Diameter (IN)
2	19
3	36
4	43
5	60
6	72
8	96
10	120
12	144
#FT	Centerline diameter


Mounting Options



POWER CORD + AIRCRAFT CABLE
SC - SINGLE CANOPY



POWER CORD + AIRCRAFT CABLE
MC - MULTIPLE CANOPIES



STEM
MC - MULTIPLE CANOPIES


* For single canopy option, the minimum required mounting heights: Ø 2' : min 15" | Ø 3' : min 22" | Ø 4' : min 29".

CURVIA 2 ACOUSTIX


RING
PENDANT




Standard Color Options




FWN - FROST WHITE



FON - FOG



ION - IRON



TBN - TRUE BLACK



MDN - MIDNIGHT BLUE



LVN - LAVENDER




LEN - LATTE



CYN - CHERRY



PMN - PLUM



FGN - FOREST GREEN

Premium Color Options*



PKN - PAPRIKA




OGN - ORANGE



LNN - LEMON



LMN - LIME




EGN - EVERGREEN



CDN - CLOUDY



LCN - LICHEN



SYN - SKY



BLN - BLUEBERRY



NVN - NAVY




IVN - IVORY




SLN - STEEL



CNN - CARBON



GHN - GRAPHITE



CLN - CHARCOAL



BHN - BLUSH



CFN - CAFÉ



GRN - GREIGE



MON - MOCHA



ESN - ESPRESSO

*Please consult factory for
more color options.
*Lead time may vary.

CURVIA 2 ACOUSTIX

RING PENDANT



Acoustic Calculator

Using the Lumenwerx Acoustix Value Calculator table, you can determine the number of acoustic luminaires required in a space by fixture type. We have three levels of recommended sound reduction: good, better, and best. Choosing one of these options will reduce the sound accordingly. The best option indicates the best acoustic improvement. Calculations are based on a standard ceiling height of 9 feet.

Value calculator table

		Room dimensions under 300 sq ft			Room dimensions over 300 sq ft		
FIXTURE LENGTH	FIXTURE HEIGHT	GOOD 😊	BETTER 😊😊	BEST 😊😊😊	GOOD 😊	BETTER 😊😊	BEST 😊😊😊
% in reduction in reverberation time		25%	40%	50%	25%	40%	50%
1'	8"	4.75	2.25	1.5	7.25	3.75	2.5
	12"	7.25	3.5	2	11.25	5.5	3.5
	16"	9.5	4.75	3	14.5	7.25	4.75

Use the **Lumenwerx Acoustix Value Formula** to determine the number of luminaires needed in the room.

$$\frac{\text{Room square footage (sq ft)}}{\text{Fixture length (ft)} \times \text{Value}} = \text{Number of luminaires.}$$

Example: How many 4' length x 8" height luminaires are needed for a 10' x 10' room size, for a BEST (50%) acoustic:
 $(10' \times 10') \div (4' \times 1.5) = 17$ luminaires

NOTES:

- Lumenwerx acoustic calculators were developed to act as a guide. For precise acoustic performance in a space, please consult an acoustician.

CURVIA 2 ACOUSTIX

RING


PENDANT




Photometrics

Values calculated based on 4' straight segments at 3500K for all optics.

DIRECT OPTICS




LM/FT	W/FT	LM/W
350	3.1	113
500	4.6	109
750	7.2	104



LM/FT	W/FT	LM/W
350	3.6	96
500	5.4	93
750	8.5	88

INDIRECT OPTIC



LM/FT	W/FT	LM/W
350	2.4	149
500	3.5	145
750	5.4	139

MULTIPLIER TABLE

Use this table to get results for different color temperatures for all photometric tables.

CCT	WATTS		LPW
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	
2700K	1.05		0.95
3000K	1.02		0.98
3500K	1.00		1.00
4000K	1.00		1.00
5000K	0.96		1.04

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\left(\frac{\text{DIRECT LM/FT} + \text{INDIRECT LM/FT}}{\text{DIRECT W/FT} + \text{INDIRECT W/FT}} \right) = \text{LPW}$$

CURVIA 2 ACOUSTIX

RING

PENDANT



Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO)

Lumenwerx's High-Efficiency Lambertian Optic is engineered with reflective sidewalls that distribute LED output across acrylic shielding. To negotiate the curves of Lumenwerx rounded fixtures, the HLO is equipped with proprietary SupremeGrip™ technology, which keeps the optic securely in place.

Asymmetric Opal Optic (AOO)

The Asymmetric Opal Optic (AOO) provides targeted illumination while diffusing light evenly, minimizing glare and spill. Its design creates a soft, inviting ambiance, making it ideal for architectural and accent lighting in modern spaces.

LIGHT SOURCE

Static white

Custom array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operate at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

Battery

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING

Pendant fixtures can be mounted either with aircraft cable or with stem.

FINISH

Interior: 95%, reflective matte powder coated white paint.

Exterior: Matte white, matte black or aluminum powder coating. Custom finishes are also available.

ACOUSTIC FINISH

Material is 100% polyester containing up to 50% of recycled plastic bottles (PET) with an ASTM E-84 Class A / CAN ULC S102 fire rating and is moisture resistant.

CARE

Remove dust and debris with a clean, dry, soft, lint-free cloth, or vacuum.

WEIGHT

Direct: 3 lb/ft - 1.36 kg/ft

Direct/Indirect: 5 lb/ft - 2.26 kg/ft

CONSTRUCTION

Housing: Extruded aluminum and aluminum sheet

Reflectors: Aluminum

Optic: Acrylic

Hanger: Chromed griplock securely attached in end caps and/or joiners with stainless steel hardware

Aircraft cable suspension: Ø 1/16" stainless steel aircraft cable

Stem: Ø 1/2" threaded steel tube

ENVIRONMENT

Ambient temperature at fixture location shall not exceed 30°C/86°F. For indoor use only.

CERTIFICATION

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.