

CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE

 **Lumenwerx**

Declare.



Our extensive Curvia family illuminates with elegant curvilinear shapes and patterns, enhancing spaces with a soft touch and a graceful sense of movement. Curvia Seal luminaires are specifically engineered for applications that require varying levels of protection from dust and water and available at three Ingress Protection (IP) levels: IP54, IP64, and IP65.



SENSORS
For latest information on sensors, click [here](#).



Curvia Additions Brochure

Curvia Family (Refer to other spec sheets)

Curvia Mini

1"



Ring

Curvia Slim

1", 2"



Ring
Shapes
Pattern

Curvia Slim Seal

1", 2"



Ring
Shapes
Pattern

Curvia Prism

2"



Ring
Shapes
Pattern

Curvia

2", 3", 4"



Ring
Shapes
Pattern

Curvia XYZ

2", 3"



Pattern

Curvia Horizon

2", 3"



Ring
Shapes

Curvia Perimeter

2", 3", 4", 5"



Pattern

Curvia Seal Perimeter

2", 3", 4"



Pattern

Curvia Seal

2", 3", 4"



Ring
Shapes
Pattern

Curvia Acoustix

2"



Ring
Shapes
Pattern

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931-4862
www.lumenwerx.com



Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.
CURVIA2-SEAL-RING-SPEC-REV1 May 5, 2026

CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE



IMPORTANT:
Fixture must
be installed
with direct lens
facing down.

Project: _____
Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	ENVIRONMENT ²	SIZE ^{3,4}	DIRECT OPTIC	INDIRECT OPTIC Specify NA for Direct fixture
				EPDO	
CURV2SEALRIP - Curvia 2" Seal Ring Pendant CURV2SEALRIR - Curvia 2" Seal Ring Recessed CURV2SEALRIS - Curvia 2" Seal Ring Surface	D - Direct DI ¹ - Direct/Indirect ¹ Available for pendant mounting only.	<u>Direct</u> IP65 - IP65-Rated IP54 - IP54-Rated ² See page 4 for more information on the features and installation details for each environment option.	<u>Direct/Indirect</u> IP64 - IP64-Rated 2FT - Ø 2' 3FT - Ø 3' 4FT - Ø 4' 5FT - Ø 5' 6FT - Ø 6' ³ Dimensions are referenced to fixture centerline. See page 3 for actual dimensions. ⁴ Ø 8" and over will be shipped in separate pieces. ⁵ Minimum Ø 2'.	EPDO - Environmentally Protected Direct Optic	EPIO - Environmentally Protected Indirect Optic NA - Not applicable
LIGHT SOURCE ⁶	CRI	DIRECT LUMEN PACKAGE ⁷	INDIRECT LUMEN PACKAGE ⁹ Specify NA for Direct fixture	COLOR TEMP.	VOLTAGE
SW - Static white FS - Full spectrum static white ⁶ Chromawerx SOLA, DUO, and QUADRO also available. Consult factory.	<u>Static white</u> 80CRI - 80+ CRI 90CRI - 90+ CRI <u>Full spectrum</u> 95CRI - 95+ CRI	350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft 1000LMF ⁸ - High output 1000 lm/ft ⁷ To calculate the total lumens, multiply the lumen package (lm/ft) by the circumference of the ring (diameter x π). ⁸ Not available with full spectrum.	350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft NA - Not applicable ⁹ To calculate the total lumens, multiply the lumen package (lm/ft) by the circumference of the ring (diameter x π).	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁰ - 347V ¹⁰ Available with DI driver only. Minimum Ø 7" fixture for integral drivers.
DRIVER ¹¹	ELECTRICAL				
DI - 1% 0-10V ELV ^{12,13} - ELV 120V TRI ^{12,13} - TRIAC 120V DA ¹⁴ - DALI LDEI ^{13,14} - Lutron Hi-Lume 1% Eco ELDI - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V RLTDIO ¹⁵ - Low-temperature 10% 0-10V ¹¹ Integral or remote subject to factory evaluation. Code will be updated with prefix "R" if factory determines driver to be remote. ¹² Available with 120V only. ¹³ Not suitable for temperatures below 0°C (32°F). ¹⁴ On-site commissioning is required. ¹⁵ Driver is remote. A remote driver box is provided. Suitable for temperatures down to -40°C/F.	1C - 1 circuit 2C ¹⁶ - 2 circuits EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{17,18,19} - Generator transfer device fixture ¹⁶ Available for Direct/Indirect only. Separate direct and indirect circuits. ¹⁷ Integral or remote subject to factory evaluation. GTD/EMB must be housed with the driver. ¹⁸ Not available with 347V. ¹⁹ Not suitable for environments below 0°C (32°F). ²⁰ The battery powers the direct LEDs. ²¹ Not available with EC or GTD. To specify, add +EMB() to the selected electrical option and specify the lighting configuration desired, e.g. 1C+EMB(FL). ²² Only available with Ø 2" to Ø 4". ²³ Only available with Ø 5" and bigger. For Ø 5" to Ø 6", fixture will be half lit. For Ø 7" to Ø 9", fixture will be third lit. For Ø 10" to Ø 12", fixture will be quarter lit.				
	<u>Emergency battery option</u> ^{17,18,19,20,21} +EMB(FL) ²² - Emergency battery, fully lit +EMB(SL) ²³ - Emergency battery, section lit				
POWER FEED	MOUNTING ²⁶	FINISH	OPTION		
TF - Top feed EF ²⁴ - End feed ²⁴ Not available with pendant mounting options.	PENDANT ²⁶ SSTS - Stem, standard SSTC() - Stem, custom ²⁶ The mounting option selected must reflect the luminaire ID. ²⁶ Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options.	RECESSED DTR - Trim DMF - Drywall mud flange	SURFACE GSM - Gasketed surface mount	W - Matte white AL - Aluminum B - Matte black WA - White antimicrobial Silverwerx CF# - Custom finish, specify RAL#	CRF - Corrosion-resistant finish NA - None

CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE



Pendant Mounting Code

Stem

Standard

SSTS - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable

Custom

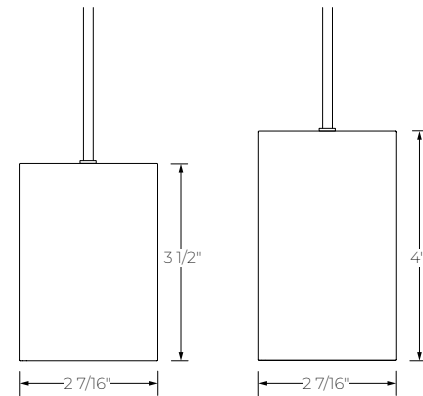
Example: SSTC(5NPC-36IN-W-STW-PCW-SLS)

SSTC() - Stem, custom

NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	POWER CORD COLOR	OPTION
5NPC - Ø 5" non-power canopy	18IN - 18" 36IN - 36" #IN ² - Specify length in inches ² Minimum length is 6". Maximum length is 72". Stem is not field adjustable.	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STW - Matte white STAL - Aluminum STB - Matte black STCF# - Custom finish, specify RAL#	PCW - White PCB - Black	SLS - Sloped ceiling for stem NA - None

Dimensions


PENDANT



DIRECT

DIRECT/INDIRECT

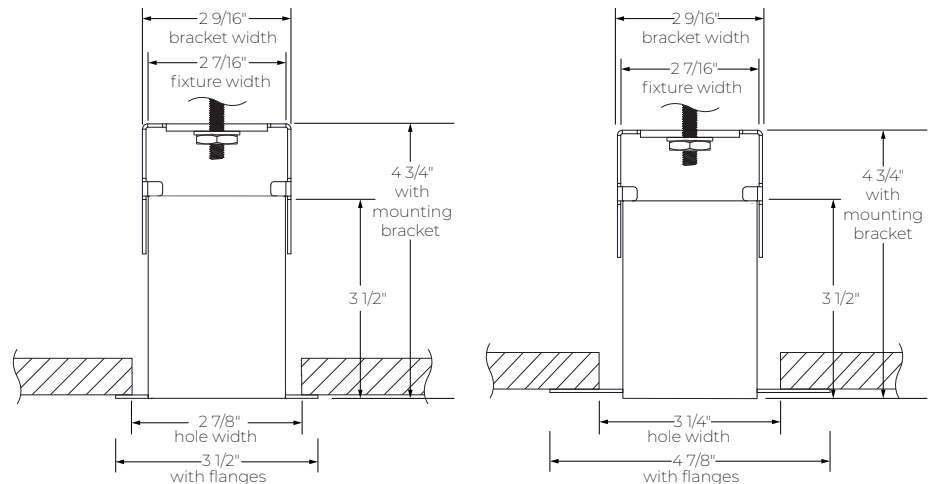
RECESSED



DTR - Trim

DMF - Drywall mud flange

SURFACE



Nominal Diameter (FT)	Centerline Diameter (IN)
2	19
3	36
4	43
5	60
6	72
8	96
10	120
12	144
#FT	Centerline diameter

GSM - Gasketed surface mount




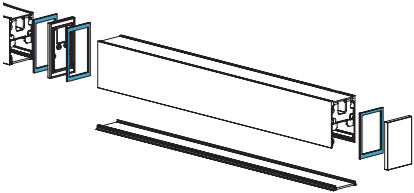
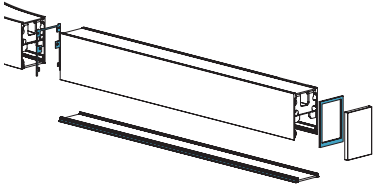
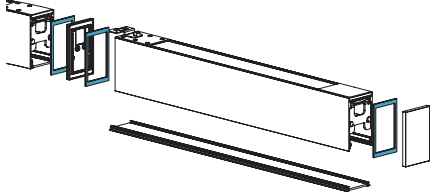
CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE



Environment Options

DIRECT		DIRECT/INDIRECT
IP65-RATED	IP54-RATED	IP64-RATED
		
Fixture is dust-tight and sealed against water jets from any direction.	Fixture is dust and water-splash protected with reinforced sealed protection for internal electrical components*. The lens, joiners and end caps are gasketed for secure sealing.	Fixture is dust-tight and sealed against water splashes from any direction.
Wet listed	Wet listed	Wet listed
Low-profile joiner bridge every 8'	Gasketed joiner	Low-profile joiner bridge every 8'
		
Direct	Direct	Indirect Direct
		
OUTDOOR: Exposed to the elements Suitable for ambient temperatures of -20°C (-4°F) to 30°C (86°F)**	OUTDOOR: Mild exposure to the elements, under canopy Suitable for ambient temperatures of -20°C (-4°F) to 30°C (86°F)**	OUTDOOR: Slightly exposed to the elements Suitable for ambient temperatures of -20°C (-4°F) to 30°C (86°F)**
INDOOR: Wet Listed applications, healthcare applications, high-maintenance settings	INDOOR: Wipe-down environments	INDOOR: Wet listed applications, healthcare applications, high-maintenance settings

* Internal electrical components are IP65-rated. The driver is fully enclosed, wiring connections are sealed to prevent ingress of dust and moisture, and the LED board is conformal-coated for enhanced protection.

** Some restrictions apply.

CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE



Photometrics

Values calculated based on 4' straight segments at 3500K for all optics.

DIRECT OPTIC



LM/FT	W/FT	LM/W
350	3.1	113
500	4.6	109
750	7.2	104
1000	10.1	99

INDIRECT OPTIC



LM/FT	W/FT	LM/W
350	2.4	149
500	3.5	145
750	5.4	139

MULTIPLIER TABLE

Use this table to get results for different color temperatures for all photometric tables.

CCT	WATTS		LPW	
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI
2700K	1.05		0.95	
3000K	1.02		0.98	
3500K	1.00		1.00	
4000K	1.00		1.00	
5000K	0.96		1.04	

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\frac{\left(\begin{array}{cc} \text{DIRECT} & + \\ \text{LM/FT} & \end{array} \right) + \left(\begin{array}{cc} \text{INDIRECT} & + \\ \text{LM/FT} & \end{array} \right)}{\left(\begin{array}{cc} \text{DIRECT} & + \\ \text{W/FT} & \end{array} \right) + \left(\begin{array}{cc} \text{INDIRECT} & + \\ \text{W/FT} & \end{array} \right)} = \text{LPW}$$

CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE



Technical Specifications

OPTICS

Environmentally Protected Optic (EPDO, EPIO)

The Environmentally Protected Optic features an innovative sealed design with our exclusive Supreme Grip™ Technology and advanced gasketing, ensuring a precise, secure fit on the extrusion while delivering superior protection against dust, water, and UV distortion.

LIGHT SOURCE

Static white

Custom array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operate at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. An optional low temperature 10% 0-10V driver, suitable for temperatures down to -40°C/F is also available. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

Battery

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

Generator Transfer Device (GTD)

A UL924 listed shunt relay that can bypass both line voltage (120-277 VAC) and 0-10V dimming signal. Suited for ambient temperatures of 0°C (32°F) to 60°C (140°F).

MOUNTING

Pendant: Pendant fixtures can be mounted with stem.

Recessed: Recessed fixtures can be mounted in ceilings with trim or mud flange options.

Surface: Surface fixtures can be mounted directly to hard surface ceilings, hardware supplied by others. A minimum of 6" from the vertical wall is required.

FINISH

Interior: 95%, reflective matte powder coated white paint.

Exterior: Matte white, matte black or aluminum powder coating. Custom finishes are also available.

CONSTRUCTION

Housing: Extruded aluminum and aluminum sheet

Reflectors: Aluminum

Lens: Polycarbonate

Stem: Ø 1/2" threaded steel tube

WEIGHT

	Pendant	Recessed	Surface
IP65	2.2 lb/ft - 1 kg/ft	2.75 lb/ft - 1.25 kg/ft	2.2 lb/ft - 1 kg/ft
IP54	2 lb/ft - 0.90 kg/ft	2.5 lb/ft - 1.13.90 kg/ft	2 lb/ft - 0.90 kg/ft
IP64	2.75 lb/ft - 1.3 kg/ft	N/A	N/A

CURVIA 2 SEAL

RING

PENDANT - RECESSED - SURFACE



CERTIFICATIONS

ETL: IP65-Rated, IP64-Rated, and IP54-Rated environment options are ETL Wet Listed. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. During the installation of Wet Listed fixtures, the contractor is responsible for properly sealing all mounting and electrical connection points.

IC rated: Suitable for direct contact with insulation. For Recessed mounting only.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.