


UBIK SEAL PERIMETER

RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM



Project: _____

Type: _____

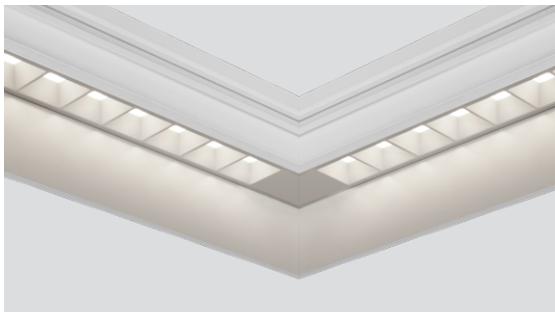

DESCRIPTION

Sleek square form meets superb function in Ubik, a lighting family designed to provide a multitude of creative options. With a 2.5" aperture, Ubik Seal Perimeter offers subtle, low-glare illumination in level, shallow, and deep recessed arrangements with a parabolic louver option for direct illumination. Ubik Seal Perimeter comes in static white and full spectrum. For Chromawerx SOLA and DUO solutions, consult other spec sheets.

SENSORS

For latest information on sensors, click [here](#).



IC RATED

IP54

Order Guide

Up to 135 lm/W performance

LUMINAIRE ID	DISTRIBUTION	OPTIC	LIGHT SOURCE ²	CRI
	D			
UBISEALPERLPAT ¹ - Ubik Seal Perimeter Level Pattern UBISEALPERSPAT ¹ - Ubik Seal Perimeter Shallow Pattern UBISEALPERDPAT ¹ - Ubik Seal Perimeter Deep Pattern	D - Direct	MWPL - Matte White Parabolic Louver MSPL - Matte Silver Parabolic Louver MBPL - Matte Black Parabolic Louver	SW - Static white FS - Full spectrum static white ² Chromawerx SOLA and DUO also available. Consult other spec sheet.	80CRI ³ - 80+ CRI 90CRI ³ - 90+ CRI 95CRI ⁴ - 95+ CRI

¹IP54 rated gasketed construction with an additional clear polycarbonate lens.

³Not available with full spectrum.
⁴Only available with full spectrum.

LUMEN PACKAGE	COLOR TEMP.	PATTERN LENGTH	CORNER TYPE ⁹	VOLTAGE	DRIVER ¹²
350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft 1000LMF ^{5,6} - High output 1000 lm/ft 1200LMF ^{5,6} - Ultra high output 1200 lm/ft	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	##FT##IN(##FT##IN-##FT##IN-...) ^{7,8} - ##FT##IN: total nominal length of pattern in feet and/or inches #X: quantity of each section #FT##IN: nominal length of each section in feet and/or inches Continuous runs: lengths over 12' ⁷ Minimum length 3'. ⁸ Parabolic louvers are only available in 6" increments. If the fixture length is not a multiple of 6", blanks of equal length will be added at both ends of the fixture.	#LEVI2C(A##) - 2-way leveled inside corner #LEVO2C(A##) - 2-way leveled outside corner ⁹ Specify quantity (#) and angle (A##) for each required corner type. If more than one option is specified, separate codes with a "+", e.g. 1LEVI2C(A90)+2LEVO2C(A90). ¹⁰ Minimum angle is 45°.	ANGLE (A##): (A90) - 90° (A##) ¹⁰ - Custom 120V - 120V 277V - 277V UNV - 120V-277V 347V ¹¹ - 347V ¹¹ Available with D1 only.	D1 - 1% 0-10V ELV ¹³ - ELV 120V TRI ¹³ - TRIAC 120V DA ¹⁴ - DALI LDE1 ¹⁴ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ¹² PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹³ Available with 120V only. ¹⁴ On-site commissioning is required.

⁵Not available with full spectrum.
⁶Available for non-IC applications only.

⁷Minimum length 3'.

⁸Parabolic louvers are only available in 6" increments. If the fixture length is not a multiple of 6", blanks of equal length will be added at both ends of the fixture.

⁹Specify quantity (#) and angle (A##) for each required corner type. If more than one option is specified, separate codes with a "+", e.g. 1LEVI2C(A90)+2LEVO2C(A90).

¹⁰Minimum angle is 45°.

¹²PoE (Power-over-Ethernet) compatible. Consult factory for details.

¹³Available with 120V only.

¹⁴On-site commissioning is required.

ELECTRICAL	ELECTRICAL SECTIONS (optional) ^{18,19}	MOUNTING	FINISH	OPTIONS ²⁴
1C - 1 circuit #MC ¹⁵ - Multi circuit EC - Emergency powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{16,17} - Generator transfer device fixture	#EC## ²⁰ - Emergency-powered section #NL## ²⁰ - Night light section #DL## ²⁰ - Daylight section #GTD## ^{20,21,22} - Generator transfer device section #EMB ^{22,23} - Emergency powered battery NA - None	TG9 - Tegular 9/16" TG15 - Tegular 15/16" TB9 - T-bar 9/16" TB15 - T-bar 15/16" ST - Screw slot T-bar DTR - Trim DTL - Trimless DMF - Drywall mud flange	W - Matte white AL - Aluminum B - Matte black WA - White antimicrobial Silverwerx CF# - Custom finish, specify RAL#	NEF ^{25,26} - No end flanges FEP ²⁶ - Flush end plates CRF - Corrosion-resistant finish GCK - Grid gasket FUI20 - Fuse 120V FU277 - Fuse 277V CP - Chicago Plenum NA - None

¹⁵Specify total number of circuits (#), including any circuits required for electrical section options. Provide drawing or layout specifications. Minimum 4' section per circuit.

¹⁶Minimum 4' fixture.

¹⁷Not available with 347V.

¹⁸Specify with multi circuit (#MC) electrical option only.

¹⁹Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'.

²⁰Specify quantity (#), and section length in inches (##).

²¹Minimum 4' section.

²²Not available with 347V.

²³Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section.

²⁴Separate codes with a "+" if more than one is specified.

²⁵For wall-to-wall installations.

²⁶See page 4 for details.

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9

T (514) 225-4304 F (514) 931-4862

www.lumenwerx.com



Lumenwerx reserves the right to modify product specifications without notification.

© Lumenwerx, ULC. All rights reserved.

UBIK-SEAL-PERIMETER-PATTERN-SPEC-REV4 April 16, 2026




UBIK SEAL PERIMETER




RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM

Dimensions


LEVEL




SHALLOW




DEEP

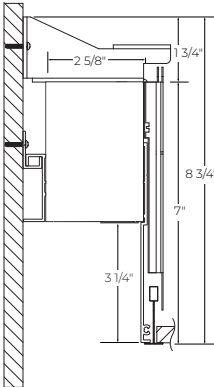


TRIM



TRIMLESS









DRYWALL MUD FLANGE



* For Level, the hole width is 3 5/16".

GRID

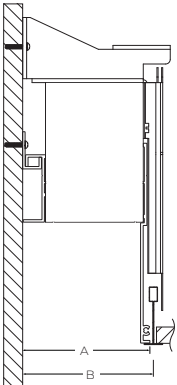

	TC9	TB9	TC15	TB15	ST
					
	Regular 9/16"	T-bar 9/16"	Regular 15/16"	T-bar 15/16"	Screw slot T-bar
A wall to flange	3 7/16"		3 9/16"		3 7/16"
B wall to T-bar	3 1/2"		3 5/8"		3 1/2"

UBIK SEAL PERIMETER




RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM

Pattern Layout


CORNER TYPES

LEVELED INSIDE CORNER



1LEVI2C(A90)


LEVELED OUTSIDE CORNER




1LEVO2C(A90)

2-way

EXAMPLES

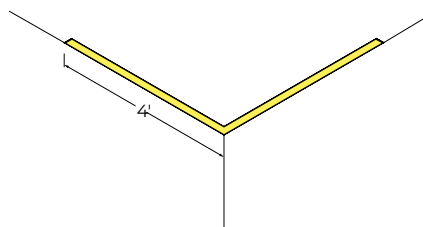

8FT(2X4FT)-1LEVI2C(A90)

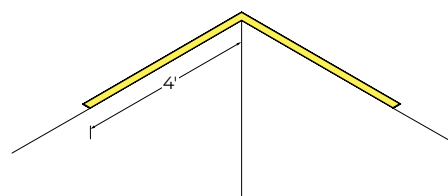

8FT(2X4FT)-1LEVO2C(A90)

UBIK SEAL PERIMETER




RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM

Photometrics

Values calculated based on a 4' fixture at 3500K for all optics. Watts and lumens per watt may vary based on the type of driver selected.

MWPL

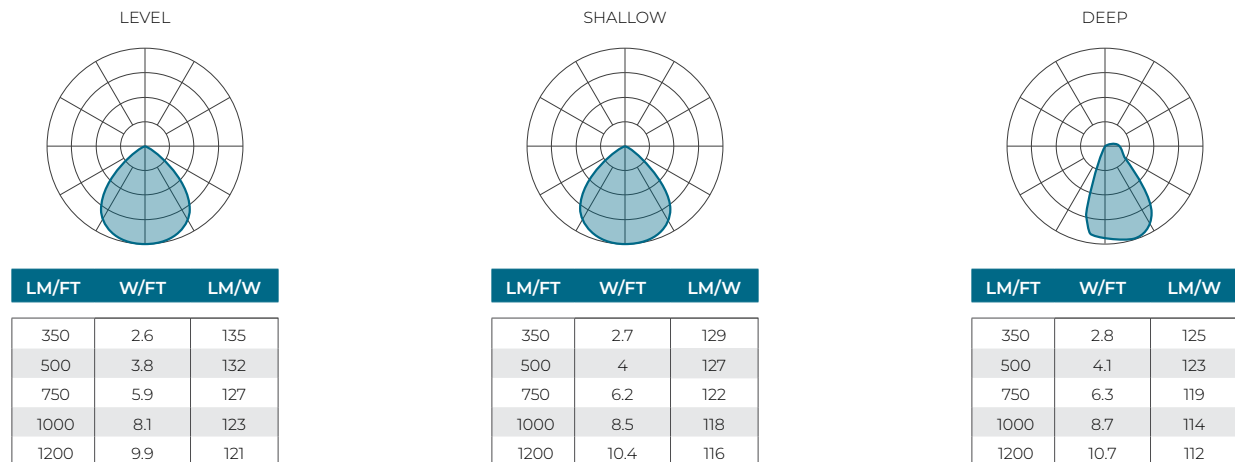

MULTIPLIER TABLE


Use the table to get results for different color temperatures for all photometric tables.

Multiplier - MWPL/MSPL/MBPL


CCT	WATTS		LPW
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	
2700K	1.04	0.96	
3000K	1.00	1.00	
3500K	1.00	1.00	
4000K	0.99	1.01	
5000K	0.94	1.06	

End Configurations


STANDARD

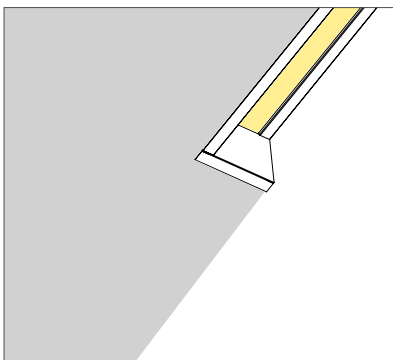

OPTIONS

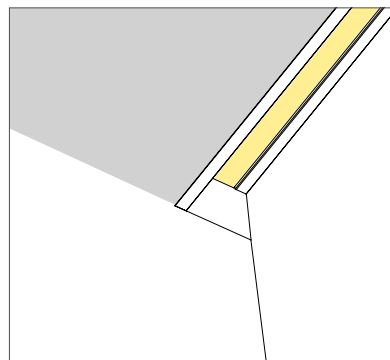

NEF - No end flanges

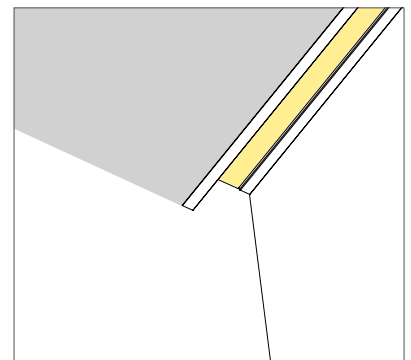

FEP - Flush end plates

UBIK SEAL PERIMETER



RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM

Technical Specifications

OPTICS

Parabolic Louvers

Parabolic louvers provide excellent shielding and a pleasing crisp visual texture. The precisely molded louvers consist of 1" deep blades and are 2"x2" in size. The LED array is secured in the direct position, with the light transmitting through a beam-forming lens creating a conical distribution. Three matte finishes are available in black, white and silver, offering a soft appearance, a wide beam spread of up 85-91 degrees, gentle brightness transition at cut-off, and exceptional UGR.



LIGHT SOURCE

Static white

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

WELL BUILDING STANDARD



WELL for Light: The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when full spectrum is selected
- Feature 58 or L07 when 90+ CRI is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5% or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



WELL for Mind: This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

For more information please contact well@lumenwerx.com.

PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

UBIK SEAL PERIMETER



RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.
Code: 2MC-2EC96

Example 2: A 24' Direct fixture with one 4' generator transfer device section.
Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required. Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING

Recessed fixtures can be mounted into exposed or concealed T-bar or tegular ceiling, as well as in ceilings with trim, trimless, or mud flange options.

FINISH

Interior: 95% reflective matte powder coated white paint

Exterior: Powder-coat paint in standard white, aluminum, or black. Optional antimicrobial finish, as well as custom finishes, also available.

CONSTRUCTION

Housing: Extruded aluminum, up to 90% recycled content

Joiner bracket (DTL-DTR): Cold drawn steel

Joiner bracket (other): Galvanised steel

Louvers: Injection molded optical grade polycarbonate, up to 95% reflective

Parabolic heatsink: Extruded aluminum, up to 90% recycled content

Recessed flanges: Extruded aluminum, up to 90% recycled content

End plate: Aluminum sheet

Gasket: Closed-cell silicone foam gasket

Grid gasket (CGK option): 1/16" closed-cell silicone foam, assures a better seal between the fixture and the grid

CERTIFICATIONS

IP54: Rated environment options are ETL Wet Listed. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. During the installation of Wet Listed fixtures, the contractor is responsible for properly sealing all mounting and electrical connection points.

IC rated: Suitable for direct contact with insulation

Chicago Plenum: City of Chicago Approved (CCEA) when specified with CP option.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.