


VIA 2 PRISM


PENDANT

DIRECT/INDIRECT, DIRECT

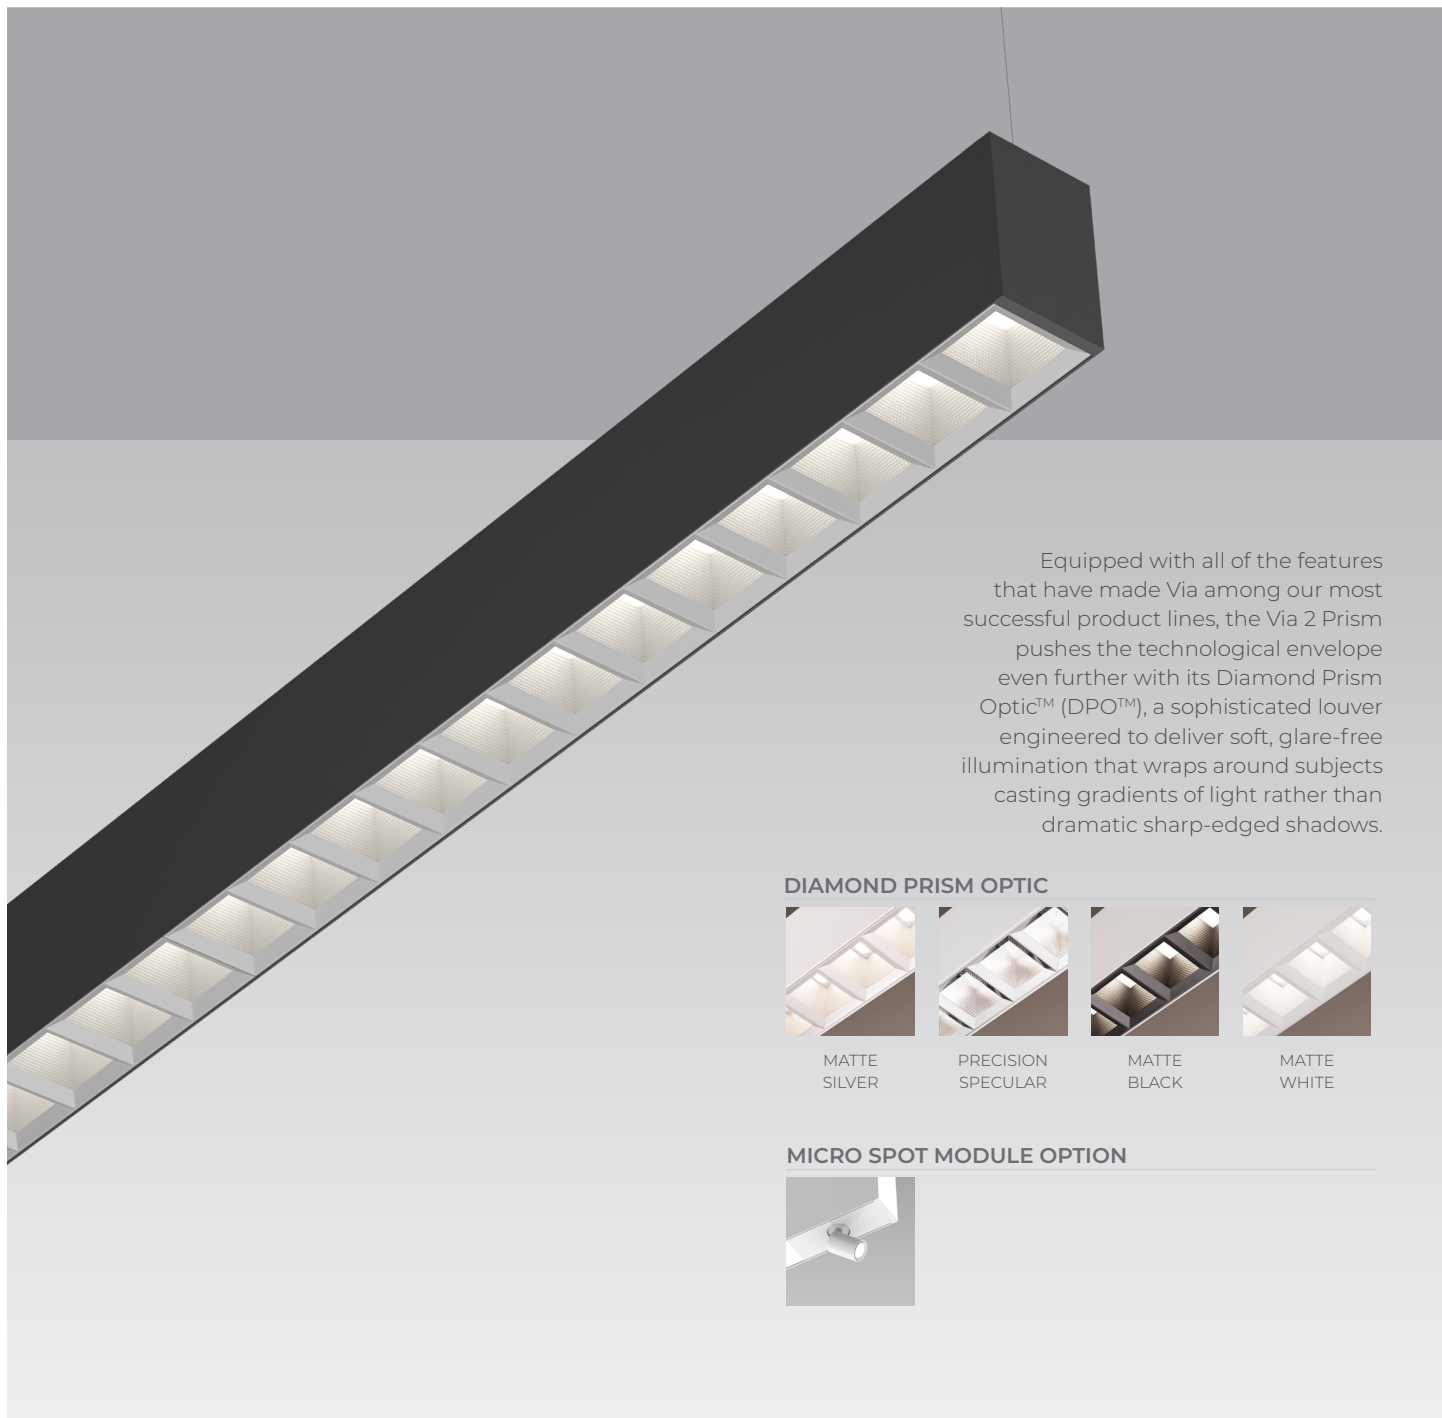

Equipped with all of the features that have made Via among our most successful product lines, the Via 2 Prism pushes the technological envelope even further with its Diamond Prism Optic™ (DPO™), a sophisticated louver engineered to deliver soft, glare-free illumination that wraps around subjects casting gradients of light rather than dramatic sharp-edged shadows.


DIAMOND PRISM OPTIC




MATTE
SILVER



PRECISION
SPECULAR



MATTE
BLACK



MATTE
WHITE

MICRO SPOT MODULE OPTION



SENSORS
For latest
information
on sensors,
click [here](#).



VIA 2 PRISM

PENDANT

DIRECT/INDIRECT, DIRECT

Lumenwerx



Project: _____

Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	DIRECT OPTIC	INDIRECT OPTIC Specify NA for Direct fixture	LIGHT SOURCE ¹	CRI		
VIA2PRP							
VIA2PRP - Via 2" Prism Pendant	DI - Direct/ Indirect D - Direct	SDPO - Matte Silver Diamond Prism Optic PDPO - Precision Specular Diamond Prism Optic BDPO - Matte Black Diamond Prism Optic WDPO - Matte White Diamond Prism Optic	WIO2 - Widespread Indirect Optic TIO - Translucent Indirect Optic WAI2 - Widespread Asymmetric Indirect Optic NA - Not applicable	SW - Static white FS - Full spectrum static white ¹ Chromawerx SOLA and DUO also available. Consult factory.	80CRI ² - 80+ CRI 90CRI ² - 90+ CRI 95CRI ³ - 95+ CRI ² Not available with full spectrum. ³ Not available with static white.		
DIRECT LUMEN PACKAGE		INDIRECT LUMEN PACKAGE Specify NA for Direct fixture		COLOR TEMPERATURE	LUMINAIRE LENGTH	VOLTAGE	
350LMF ⁴ - Low output 350 lm/ft 500LMF ⁵ - Medium output 500 lm/ft 750LMF ⁶ - High output 750 lm/ft 1000LMF ^{7,8,9} - Ultra high output 1000 lm/ft 1200LMF ^{8,9,10} - Hyper output 1200 lm/ft ⁴ Minimum 4' with ELV/TRI driver options. ⁵ For BDPO, Indirect must not exceed 1000 lm/ft. ⁶ For BDPO, Indirect must not exceed 500 lm/ft. ⁷ For PDPO/SDPO/WDPO, Indirect must not exceed 1000 lm/ft. ⁸ Not available with BDPO. ⁹ Not available with full spectrum.		350LMF ⁴ - Low output 350 lm/ft 500LMF - Medium output 500 lm/ft 750LMF - High output 750 lm/ft 1000LMF ^{9,11} - Ultra high output 1000 lm/ft 1200LMF ^{9,11,12} - Hyper output 1200 lm/ft NA - Not applicable ¹⁰ For PDPO/SDPO/WDPO, Indirect must not exceed 750 lm/ft. ¹¹ Not available with WAI2. ¹² Fixture will be very bright. Use in suitable applications.		27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	#FT#IN ¹³ - Specify nominal length (#) in 1' and/or 6" increments Standard nominal lengths: Single units: 2' to 12' Continuous runs: lengths over 12' ¹³ Minimum 3' for Direct/Indirect.	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁴ - 347V ¹⁴ Available with DI driver only.	
DRIVER ¹⁵		ELECTRICAL		ELECTRICAL SECTIONS (optional) ^{22,23}		MOUNTING ²⁸	
D1 - 1% 0-10V ELV ¹⁶ - ELV 120V TRI ¹⁶ - TRIAC 120V DA ¹⁷ - DALI LDEI ¹⁷ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ¹⁵ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁶ Available with 120V only. ¹⁷ On-site commissioning is required.		1C - 1 circuit 2C ¹⁸ - 2 circuits #MC ¹⁹ - Multi circuit EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{20,21} - Generator transfer device fixture ¹⁸ Available for Direct/Indirect only. Separate direct and indirect circuits. ¹⁹ Specify total number of circuits (#), including any required for electrical section or module options. Provide drawing or layout specifications. Minimum 4' section per circuit. ²⁰ Minimum 4' fixture. ²¹ Not available with 347V.		#EC## ²⁴ - Emergency-powered section #NL## ²⁴ - Night light section #DL## ²⁴ - Daylight section #GTD## ^{24,25,26} - Generator transfer device section #EMB ^{26,27} - Emergency battery NA - None ²² Specify with multi circuit (#MC) electrical option only. ²³ Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. ²⁴ Specify quantity (#), and section length in inches (##). ²⁵ Minimum 4' section. ²⁶ Not available with 347V. ²⁷ Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section. For Direct/Indirect, minimum 8' fixture.		ACS - Aircraft cable, standard STS - Stem, standard ACC() - Aircraft cable, custom STC() - Stem, custom ²⁸ Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options.	
FINISH		CONTROL ²⁹		OPTIONS ³⁵		MODULE (optional) ^{37,38}	
W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STANDALONE CONTROLS ^{30,31} Specify the quantity (#) of sensors per fixture. #OMS ³² - Onboard Occupancy #OMS## ³³ - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight		CONNECTED CONTROLS ³⁴ LU - Lutron AWNRR - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor ENC - Encelium WL - Cooper Wavelinx ANA - Acuity nLight Air CA - Casambi LG - Legrand		FU120 - Fuse 120V FU277 - Fuse 277V CTB9 ³⁶ - T-bar caddy clip, 9/16" CTB15 ³⁶ - T-bar caddy clip, 15/16" CTG9 ³⁶ - Tegular caddy clip, 9/16" CTG15 ³⁶ - Tegular caddy clip, 15/16" CST ³⁶ - Screw slots T-bar NA - None		#MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° NA - None ³⁷ See page 3 for ordering details. ³⁸ Not available with ELV/TRI driver options.
	NA - None				³⁵ Separate codes with a "+" if more than one is specified. ³⁶ Available with aircraft cable only.		
	²⁹ Standalone and connected control options cannot be combined. ³⁰ Available with DI driver and 1 circuit options only. ³¹ Minimum 4' per zone. Provide control zone length.		³² Fixture turns off when no occupancy. ³³ Fixture dims to specified light level % (##). ³⁴ Consult factory for connected controls.				

VIA 2 PRISM

PENDANT

DIRECT/INDIRECT, DIRECT



Module Code

For a module, specify the options in the parentheses.

The light source is static white.

CRI of module matches specification of main fixture.

Example: 1MS25(5W-27K-W)

MODULE (optional)			
MODULE ^{1,2}	WATTAGE	COLOR TEMPERATURE	FINISH
#MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° ¹ Specify quantity (#). ² 6" blank per module. Blank finish will match fixture finish.	5W - 5 W, up to 430 lm output	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	W - Matte white B - Matte black

Pendant Mounting Code

Aircraft Cable

Standard

ACS - Aircraft cable, standard
• Ø 5" for power canopy • Ø 3" for non-power canopy • Canopies are black for black fixtures, and white for all other fixture finishes • Power cord is black for black fixtures, and white for all other fixture finishes • Aircraft cable length is 36"

Custom

Example: ACC(3NPC-72IN-W-PCB-NA)

ACC()				
NON-POWER CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR	OPTION
3NPC - Ø 3" non-power canopy 5NPC - Ø 5" non-power canopy	36IN - 36" 72IN - 72" 120IN - 120" #IN ¹ - Other lengths, specify in inches ¹ Maximum length is 288". For longer lengths, please consult factory.	W - White AL - Aluminum B - Black CF# - Custom finish, specify RAL#	PCW - White PCB - Black	SEM ² - Seismic mounting SLC ² - Sloped ceiling for aircraft cable NA - None ² Not available with the Ø 3" non-power canopy size.

Stem

Standard

STS - Stem, standard
• Ø 5" for power canopy • Ø 5" for non-power canopy • Canopies are black for black fixtures, and white for all other fixture finishes • Stem finish is the same color as fixture • Stem length is 18" • Stem is not field adjustable

Custom



Example: STC(5NPC-36IN-W-STW-SLS)

STC()				
NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTION
5NPC - Ø 5" non-power canopy	18IN - 18" 36IN - 36" #IN ³ - Specify length in inches ³ Minimum length is 6". Maximum length is 72". Stem is not field adjustable.	W - White AL - Aluminum B - Black CF# - Custom finish, specify RAL#	STW - White STAL - Aluminum STB - Black STCF# - Custom finish, specify RAL#	SLS - Sloped ceiling for stem NA - None

Dimensions

DIRECT/INDIRECT

DIRECT



VIA 2 PRISM

PENDANT

DIRECT/INDIRECT, DIRECT




Photometrics

Values calculated based on a 4' fixture at 3500K and 80+ CRI for all optics.


DIRECT OPTICS

SDPO




LM/FT	W/FT	LM/W
350	2.6	132
500	3.8	132
750	5.9	127
1000	8.2	122
1200	10	120

PDPO




LM/FT	W/FT	LM/W
350	2.4	147
500	3.4	147
750	5.3	142
1000	7.3	137
1200	8.9	134

BDPO



LM/FT	W/FT	LM/W
350	5.1	69
500	7.5	66
750	11.9	63
1000	16.7	60


WDPO



LM/FT	W/FT	LM/W
350	2.4	145
500	3.5	144
750	5.4	139
1000	7.4	135
1200	9.1	132


INDIRECT OPTICS

WIO2




LM/FT	W/FT	LM/W
350	2.4	145
500	3.5	141
750	5.5	136
1000	7.7	130
1200	9.5	126

TIO



LM/FT	W/FT	LM/W
350	2.7	127
500	4	124
750	6.3	119
1000	8.8	114
1200	10.9	110

WAI2



LM/FT	W/FT	LM/W
350	2.5	139
500	3.7	135
750	5.8	130

MULTIPLIER TABLES

Use these tables to get results for different color temperatures and CRI for all Direct and Indirect photometric tables.

Multiplier - CCT/CRI
SDPO, PDPO, BDPO, WDPO

CCT	WATTS		LPW	
	80+ CRI	90+ CRI	80+ CRI	90+ CRI
2700K	1.04	1.19	0.96	0.84
3000K	1.00	1.15	1.00	0.87
3500K	1.00	1.12	1.00	0.89
4000K	0.99	1.10	1.01	0.91
5000K	0.94	1.06	1.06	0.94

Multiplier - CCT/CRI
WIO2, TIO, WAI2


CCT	WATTS		LPW	
	80+ CRI	90+ CRI	80+ CRI	90+ CRI
2700K	1.05	1.27	0.95	0.79
3000K	1.02	1.23	0.98	0.81
3500K	1.00	1.19	1.00	0.84
4000K	1.00	1.19	1.00	0.84
5000K	0.96	1.12	1.04	0.89

DIRECT/INDIRECT - LPW CALCULATION


For Direct/Indirect performance values, follow the formula.

$$\frac{\left(\frac{\text{DIRECT LM/FT}}{\text{DIRECT W/FT}} + \frac{\text{INDIRECT LM/FT}}{\text{INDIRECT W/FT}} \right)}{\left(\frac{\text{DIRECT LM/FT}}{\text{DIRECT W/FT}} + \frac{\text{INDIRECT LM/FT}}{\text{INDIRECT W/FT}} \right)} = \text{LPW}$$


MICRO SPOT MODULE



Micro Spot 25°



Micro Spot 35°



Micro Spot 50°

DELIVERED LUMENS

Wattage	5.0									
CRI	80+					90+				
CCT	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
Lumen	373	400	400	432	432	324	344	344	345	372

VIA 2 PRISM

PENDANT

DIRECT/INDIRECT, DIRECT



Technical Specifications


DIRECT OPTICS

Diamond Prism Optic (DPO)


The Diamond Prism Optic™ (DPO™) is our patent-pending 3-tiered optic meticulously crafted to refract and reflect beams with great precision, effectively keeping glare to a minimum while delivering light of exceptional quality and visual comfort.




MATTE SILVER



PRECISION
SPECULAR



MATTE BLACK



MATTE WHITE

UGR - Diamond Prism Optic

LM/FT	MATTE SILVER	PRECISION SPECULAR	MATTE BLACK	MATTE WHITE
350	9.7	1.2	1.2	14.9
500	10.9	2.4	2.4	16.1
750	12.3	3.8	3.8	17.8
1000	13.3	4.8	N/A	18.8
1200	13.9	5.4	N/A	19.2

INDIRECT OPTICS

Widespread Indirect Optic (WIO2)

The Widespread Indirect Optic (WIO2) is a horizontal LED array with a widespread indirect micro prismatic optic that offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1.

Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height

Mounting height from ceiling	Spacing (Center to center)		
	8'	10'	12'
12"	5.5	10.0	9.0
18"	3.5	6.0	6.0
24"	2.5	4.0	4.5

Translucent Indirect Optic (TIO)

The Translucent Indirect Optic (TIO) is composed of a horizontal LED array that has a translucent lens to mask pixilation from the diodes. TIO has a 100° spread in the indirect that is ideal when the fixture is mounted farther away from the ceiling.

Widespread Asymmetric Indirect Optic (WAI2)

The Widespread Asymmetric Indirect Optic (WAI2) offers an upward grazing effect with a 45° forward throw. It softly highlights the ceiling in the up-light while distributing the required illumination of the rest of an interior space. For avoiding glare and enjoying visual comfort, WAI2 is an ideal solution.

LIGHT SOURCE

Static white

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operate at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

LUMINAIRE LENGTH

Via 2 Prism is available in standard lengths of 2' to 12'. Continuous runs are available for run lengths over 12'. Exact run length must be noted in the product code. The minimum length is 2' for Direct, and 3' for Direct/Indirect fixtures. Lengths can be ordered in 1' and/or 6" increments. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

VIA 2 PRISM

PENDANT

DIRECT/INDIRECT, DIRECT



PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 16' Direct/Indirect fixture with separate circuits for direct and indirect, and with one 4' night light section on the direct side on a third circuit.

Code: 3MC-1NL48

Example 3: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING

Pendant fixtures can be mounted either with aircraft cable or with stem. See page 3 for details.

FINISH

Interior: 95%, reflective matte powder coated white paint

Exterior: Matte white, matte black, or aluminum powder coating. Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.

Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

VIA 2 PRISM

PENDANT

DIRECT/INDIRECT, DIRECT




To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

MICRO SPOT MODULE

The Micro Spot is a $\varnothing 7/8"$ x $1 5/16"$ adjustable spotlight that extends, retracts, rotates 360°, and tilts 90°. Its LED light source is coupled with a TIR refractor to provide beam angles of 25°, 35°, and 50°, while producing up to 400 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K available in either 80+ CRI or 90+ CRI. The Micro Spot is offered in a white or black finish. The Micro Spot driver is mounted within the luminaire housing and accepts universal input voltage (120-277 VAC) with 0-10V dimming control.

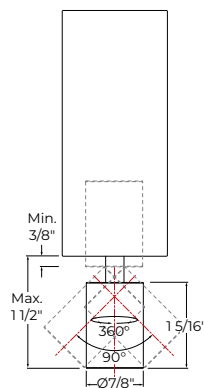

Micro Spot

CONSTRUCTION

Housing: Extruded aluminum, up to 90% recycled content

Interior brackets: Die-formed cold rolled sheet steel

Joining system: Die-cast zinc

Reflectors: Aluminum

Lens: Acrylic or polycarbonate

End caps: Die-cast aluminum

Hanger: Chromed griplock securely attached with spring steel hardware in end caps and/or joiners

Aircraft cable suspension: 7x7 braids aluminum aircraft cable 0.06" thick

Stem: $\varnothing 1/2"$ threaded steel tube

WEIGHT

Direct/Indirect

4': 10.68 lbs - 4.85 kg

8': 22.03 lbs - 10 kg

12': 32.60 lbs - 14.8 kg

Direct

4': 9.03 lbs - 4.1 kg

8': 18.28 lbs - 8.3 kg

12': 27.97 lbs - 12.7 kg

CERTIFICATION

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.