

# VIA 3 WALL

DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

 **Lumenwerx**



**Declare.**




**SENSORS**  
For latest  
information  
on sensors,  
click [here](#).



Our elegant, flexible Via family is composed of linear, pendant, surface, recessed, and wall mounted luminaires. Each lighting fixture can be installed as a discrete luminaire or in continuous runs or patterns. Via 3 Wall is offered with Lambertian, asymmetric, low-glare, or grazing reflector optics.

## Lens Positions

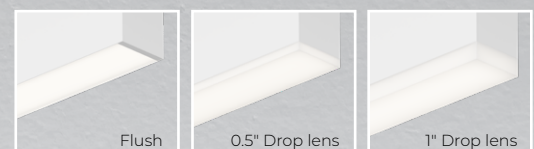

## DIRECT



HLO

ARO2

LGO

GRO

MPO

## INDIRECT



TIO

WAI2

HLO

ARO2

# VIA 3 WALL

DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS



Project: \_\_\_\_\_  
Type: \_\_\_\_\_

## Order Guide

| LUMINAIRE ID               | DISTRIBUTION                                                            | DIRECT OPTIC<br>Specify NA for Indirect fixture                                                                                                                                                                                        | LENS POSITION<br>Specify NA for Indirect fixture                                                                                                                                                                                                                                                          | INDIRECT OPTIC<br>Specify NA for Direct fixture                                                                                                                                                                                                                                                                                                                                                                                     | LIGHT SOURCE <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>VIA3W</b>               |                                                                         |                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>VIA3W</b> - Via 3" Wall | <b>DI</b> - Direct/Indirect<br><b>D</b> - Direct<br><b>I</b> - Indirect | <b>HLO</b> - High-Efficiency Lambertian Optic<br><b>ARO2</b> - Asymmetric Refractive Optic<br><b>LGO</b> - Low-Glare Optic<br><b>GRO</b> - Grazing Reflector Optic<br><b>MPO</b> - Micro-Prismatic Optic<br><b>NA</b> - Not applicable | <b>FH</b> <sup>1</sup> - Flush<br><b>0.5D</b> <sup>1</sup> - 0.5" drop<br><b>1.0D</b> <sup>1</sup> - 1.0" drop<br><b>NA</b> <sup>1</sup> - Not applicable<br><br><sup>1</sup> For HLO, specify FH, 0.5D, or 1.0D.<br>• For ARO2, LGO, GRO, and MPO, specify FH.<br>• For an Indirect fixture, specify NA. | <b>TIO</b> <sup>2</sup> - Translucent Indirect Optic<br><b>WA12</b> <sup>3</sup> - Widespread Asymmetric Indirect Optic<br><b>HLO</b> <sup>4</sup> - High-Efficiency Lambertian Optic<br><b>ARO2</b> <sup>4</sup> - Asymmetric Refractive Optic<br><b>NA</b> - Not applicable<br><br><sup>2</sup> Available only with Direct/Indirect.<br><sup>3</sup> Not available with BIOS.<br><sup>4</sup> Not available with Direct/Indirect. | <b>SW</b> - Static white<br><br><b>BIOSST</b> <sup>6,7</sup> - BIOS Biological Static<br><b>BIOSDY</b> <sup>6,7</sup> - BIOS Biological Dynamic<br><b>BIOSTU</b> <sup>6,7</sup> - BIOS Biological Tunable<br><br><sup>5</sup> Chromawerx SOLA, DUO, and QUADRO also available. Consult other spec sheets.<br><sup>6</sup> Only available with low and medium lumen packages.<br><sup>7</sup> See page 4 for details. |

| CRI                                                                                                        | DIRECT LUMEN PACKAGE<br>Specify NA for Indirect fixture                                                                                                                                                                                                                                                                                                                                      | INDIRECT LUMEN PACKAGE<br>Specify NA for Direct fixture                                                                                                                                                                                                     | COLOR TEMP.                                                                                                                                                                          | LUMINAIRE LENGTH                                                                                                                                                                                                                                                                 | VOLTAGE                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>80CRI</b> - 80+ CRI<br><b>90CRI</b> <sup>8</sup> - 90+ CRI<br><br><sup>8</sup> Not available with BIOS. | <b>350LMF</b> <sup>9</sup> - Hypo output 350 lm/ft<br><b>500LMF</b> - Low output 500 lm/ft<br><b>750LMF</b> - Medium output 750 lm/ft<br><b>1000LMF</b> - High output 1000 lm/ft<br><b>1200LMF</b> <sup>10</sup> - Hyper output 1200 lm/ft<br><b>NA</b> - Not applicable<br><br><sup>9</sup> Minimum 3' fixture.<br><sup>10</sup> Fixture will be very bright. Use in suitable applications. | <b>350LMF</b> - Hypo output 350 lm/ft<br><b>500LMF</b> - Low output 500 lm/ft<br><b>750LMF</b> - Medium output 750 lm/ft<br><b>1000LMF</b> - High output 1000 lm/ft<br><b>1200LMF</b> <sup>10</sup> - Hyper output 1200 lm/ft<br><b>NA</b> - Not applicable | <b>27K</b> <sup>11</sup> - 2700K<br><b>30K</b> - 3000K<br><b>35K</b> - 3500K<br><b>40K</b> - 4000K<br><b>50K</b> <sup>11</sup> - 5000K<br><br><sup>11</sup> Not available with BIOS. | <b>#FT#IN</b> <sup>12</sup> - Specify nominal length (#) in 1' and/or 1" increments<br><br><b>Standard nominal lengths:</b><br>Single units: 2' to 12' (up to 8' for MPO)<br>Continuous runs: lengths over 12' (8' for MPO)<br><br><sup>12</sup> Minimum 3' for Direct/Indirect. | <b>120V</b> - 120V<br><b>277V</b> - 277V<br><b>UNV</b> - 120V-277V<br><b>347V</b> <sup>13</sup> - 347V<br><br><sup>13</sup> Available with DI driver only. |

| DRIVER <sup>14</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ELECTRICAL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ELECTRICAL SECTIONS (optional) <sup>21, 22</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | MOUNTING                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>DMB</b>                            |
| <b>DI</b> - 1% 0-10V<br><b>DA</b> <sup>15</sup> - DALI<br><b>LDE1</b> <sup>15</sup> - Lutron Hi-lume 1% Eco<br><b>ELD1</b> - eldoLED 1% ECOdrive 0-10V<br><b>ELDO</b> - eldoLED 0.1% SOLOdrive 0-10V<br><b>ELV</b> <sup>16</sup> - ELV 120V<br><b>TRI</b> <sup>16</sup> - TRIAC 120V<br><br><sup>14</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details.<br><sup>15</sup> On-site commissioning is required.<br><sup>16</sup> Available with 120V only. | <b>1C</b> - 1 circuit<br><b>2C</b> <sup>17</sup> - 2 circuits<br><b>#MC</b> <sup>18</sup> - Multi circuit<br><b>EC</b> - Emergency-powered fixture<br><b>NL</b> - Night light fixture<br><b>DL</b> - Daylight fixture<br><b>GTD</b> <sup>19, 20</sup> - Generator transfer device fixture<br><br><sup>17</sup> Available for Direct/Indirect only. Separate direct and indirect circuits.<br><sup>18</sup> Specify total number of circuits (#), including any required for electrical section options. Provide drawing or layout specifications. Minimum 4' section per circuit.<br><sup>19</sup> Minimum 4' fixture.<br><sup>20</sup> Not available with 347V. | <b>#EC##</b> <sup>23</sup> - Emergency-powered section<br><b>#NL##</b> <sup>23</sup> - Night light section<br><b>#DL##</b> <sup>23</sup> - Daylight section<br><b>#GTD##</b> <sup>23, 24, 25</sup> - Generator transfer device section<br><b>#EMB</b> <sup>25, 26</sup> - Emergency battery<br><b>NA</b> - None<br><br><sup>21</sup> Specify with multi circuit (#MC) electrical option only.<br><sup>22</sup> Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'.<br><sup>23</sup> Specify quantity (#), and section length in inches (##).<br><sup>24</sup> Minimum 4' section.<br><sup>25</sup> Not available with 347V.<br><sup>26</sup> Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section. For Direct/Indirect, minimum 8' fixture. | <b>DMB</b> - Drywall mounting bracket |

| FINISH                                                                                                               | CONTROL <sup>27, 28, 29</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | OPTION                                                                   |
|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>W</b> - Matte white<br><b>AL</b> - Aluminum<br><b>B</b> - Matte black<br><b>CF#</b> - Custom finish, specify RAL# | <b>STANDALONE CONTROLS</b> <sup>30, 31</sup><br>Specify the quantity (#) of sensors per fixture.<br><b>#ODS</b> - Onboard Daylight<br><b>#OSS50</b> <sup>32</sup> - Onboard stairwell occupancy with 50% bi-level dimming<br><br><b>NA</b> - None<br><br><sup>27</sup> Standalone and connected control options cannot be combined.<br><sup>28</sup> Available with flush lens option only.<br><sup>29</sup> Consult factory for connected controls. Compatible systems include Lutron, Cooper, Acuity, Casambi, and Legrand.<br><sup>30</sup> Available with DI driver and 1 circuit options only.<br><sup>31</sup> Minimum 4' per zone. Provide control zone length.<br><sup>32</sup> Minimum 4' fixture. | <b>FU120</b> - Fuse 120V<br><b>FU277</b> - Fuse 277V<br><b>NA</b> - None |


# VIA 3 WALL

DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS




## Dimensions


Flush Lens



0.5" Drop Lens <sup>1</sup>



1.0" Drop Lens <sup>1</sup>




<sup>1</sup> Only available with HLO direct lens.

## Photometrics

Values calculated based on a 4' fixture at 3500K for all optics.


### DIRECT OPTICS

HLO (Flush lens)




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 2.8  | 125  |
| 500   | 4.1  | 123  |
| 750   | 6.3  | 119  |
| 1000  | 8.6  | 116  |
| 1200  | 10.6 | 113  |

ARO2




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 3.0  | 116  |
| 500   | 4.4  | 113  |
| 750   | 7.0  | 107  |
| 1000  | 9.7  | 103  |
| 1200  | 12.1 | 99   |

LGO




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 3.2  | 108  |
| 500   | 4.7  | 106  |
| 750   | 7.3  | 102  |
| 1000  | 10.2 | 98   |
| 1200  | 12.5 | 96   |

GRO



| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 3.3  | 108  |
| 500   | 4.8  | 104  |
| 750   | 7.6  | 99   |
| 1000  | 10.6 | 94   |
| 1200  | 13.2 | 91   |


MPO



| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 3.1  | 112  |
| 500   | 4.5  | 112  |
| 750   | 6.8  | 111  |
| 1000  | 9.5  | 105  |
| 1200  | 12.0 | 100  |


### INDIRECT OPTICS

TIO




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 2.7  | 127  |
| 500   | 4.0  | 124  |
| 750   | 6.3  | 119  |
| 1000  | 8.8  | 114  |
| 1200  | 10.9 | 110  |

WAI2




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 2.5  | 139  |
| 500   | 3.7  | 135  |
| 750   | 5.8  | 130  |
| 1000  | 8.0  | 125  |
| 1200  | 10.0 | 120  |

HLO



| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 2.8  | 125  |
| 500   | 4.1  | 123  |
| 750   | 6.3  | 119  |
| 1000  | 8.6  | 116  |
| 1200  | 10.6 | 113  |

ARO2



| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350   | 3.0  | 116  |
| 500   | 4.4  | 113  |
| 750   | 7.0  | 107  |
| 1000  | 9.7  | 103  |
| 1200  | 12.1 | 99   |

### MULTIPLIER TABLES

Use these tables to get results for different color temperatures and lens positions for all photometric tables.

Multiplier - CCT/CRI

| CCT | WATTS<br>80+ CRI / 90+ CRI | LPW<br>80+ CRI / 90+ CRI |
|-----|----------------------------|--------------------------|
|-----|----------------------------|--------------------------|

|       |      |      |
|-------|------|------|
| 2700K | 1.05 | 0.95 |
| 3000K | 1.02 | 0.98 |
| 3500K | 1.00 | 1.00 |
| 4000K | 1.00 | 1.00 |
| 5000K | 0.96 | 1.04 |

Multiplier - Lens position

| DIRECT LENS | WATTS | LPW |
|-------------|-------|-----|
|-------------|-------|-----|

|                |      |      |
|----------------|------|------|
| Flush Lens     | 1.00 | 1.00 |
| Drop Lens 0.5" | 0.98 | 1.02 |
| Drop Lens 1.0" | 0.96 | 1.04 |


### DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\left( \frac{\text{DIRECT LM/FT} + \text{INDIRECT LM/FT}}{\text{DIRECT W/FT} + \text{INDIRECT W/FT}} \right) = \text{LPW}$$

## BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable. Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

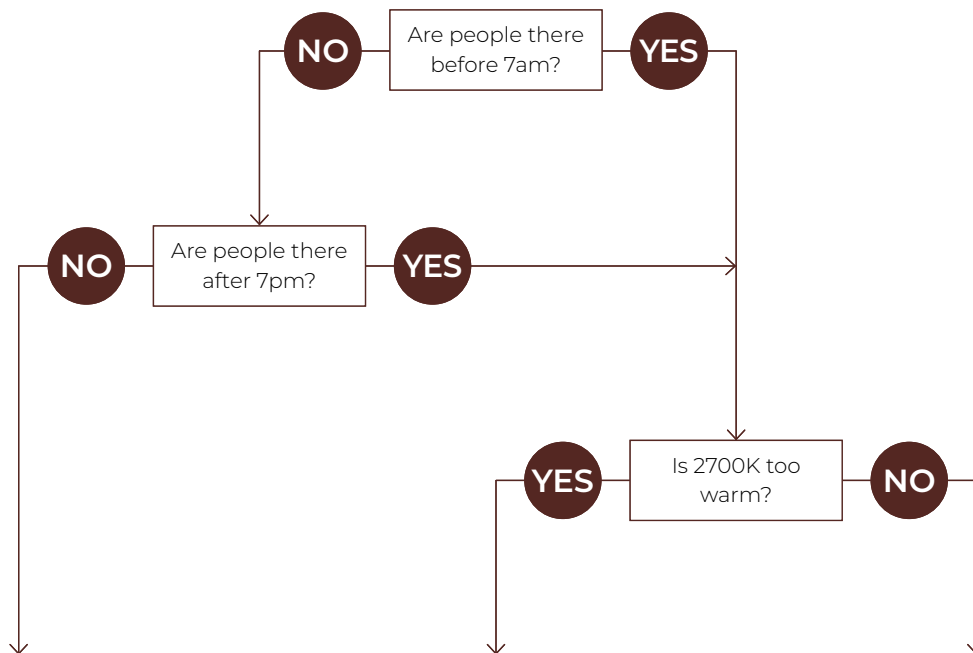

| Biological Static BIOSST                                                        | Biological Dynamic BIOSDY                                                                                         | Biological Tunable BIOSTU                                                                                                                         |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| No CCT change when dimmed<br>e.g. <b>40K</b> - 4000K stays as 4000K when dimmed | 500K shift when dimmed<br>e.g. <b>40K</b> - 4000K changes to 3500K when dimmed                                    | Dims to 2700K<br>e.g. <b>40K</b> - 4000K changes to 2700K when dimmed                                                                             |
| Daytime solution                                                                | Daytime + evening solution                                                                                        | Daytime + evening solution                                                                                                                        |
| Spaces in operation during daytime hours, between 7am and 7pm                   | Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred | Suitable for spaces in operation overnight, after 7pm and before 7am, and where people do not sleep (CCT color shift in the evening is preferred) |
| E.g. offices, medical/dental offices                                            | E.g. hospitals                                                                                                    | E.g. offices, shiftwork                                                                                                                           |
|                                                                                 |                                                                                                                   |                                                                                                                                                   |

## Technical Specifications

### DIRECT OPTICS

#### High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Available with different lens position options, HLO has a spacing criterion of 1.10.

#### Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

#### Low-Glare Optic (LGO)

The Low-Glare Optic (LGO) is designed to cut off high-angled light and control glare. The carefully crafted lens refracts light downward through its center from which it then disperses into a wide conical distribution that negates any illumination at about 40°. The LGO provides the visual comfort of a louver in a smooth acrylic lens.

#### Grazing Reflector Optic (GRO)

The Grazing Reflector Optic (GRO) is oriented to project light with maximum luminous intensity at 5° from nadir. This provides a tight beam to highlight and accentuate a wall with subtle vertical illumination.

#### Micro-Prismatic Optic (MPO)

The Micro-Prismatic Optic (MPO) delivers high-efficiency, low-glare illumination with UGR <17. Its precision-engineered lens, composed of thousands of tiny prisms, diffuses light to reduce glare, producing a ceiling plane that reads smooth from a distance while revealing subtle texture up close. The result is balanced, efficient illumination with a refined architectural presence.

### INDIRECT OPTICS

#### Translucent Indirect Optic (TIO)

The Translucent Indirect Optic (TIO) is composed of a horizontal LED array that has a translucent lens to mask pixilation from the diodes. TIO has a 100° spread in the indirect that is ideal when the fixture is mounted farther away from the ceiling.

#### Widespread Asymmetric Indirect Optic (WAI2)

The Widespread Asymmetric Indirect Optic (WAI2) offers an upward grazing effect with a 45° forward throw. It softly highlights the ceiling in the up-light while distributing the required illumination of the rest of an interior space. For avoiding glare and enjoying visual comfort, WAI2 is an ideal solution.

#### High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. HLO has a spacing criterion of 1.10.

#### Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

### LIGHT SOURCE

#### Static white

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.


# VIA 3 WALL

DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS



## BIOS

BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

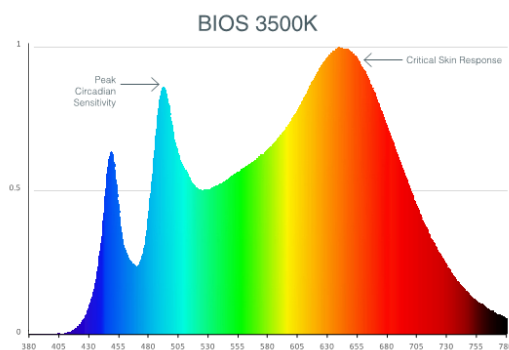

Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 4 for details.

## LUMINAIRE LENGTH

Via 3 is available in standard lengths of 2' to 12' (up to 8' for MPO). Continuous runs are available for run lengths over 12' (8' for MPO). Exact run length must be noted in the product code. The minimum length is 2' for Direct or Indirect fixtures, and 3' for Direct/Indirect fixtures. Lengths can be ordered in 1' and/or 1" increments. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

## ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eidoLED 1% ECOdrive 0-10V, eidoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

## PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

## ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

## Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 16' Direct/Indirect fixture with separate circuits for direct and indirect, and with one 4' night light section on the direct side on a third circuit.

Code: 3MC-1NL48

Example 3: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

## Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

## MOUNTING

Fixtures may be horizontally mounted to the wall using a bracket. For long runs, a minimum of 6" from adjacent wall is required.

## FINISH

**Interior:** 95% reflective matte powder coated white paint

**Exterior:** Matte white, matte black or aluminum powder coating. Custom finishes are also available.

# VIA 3 WALL

DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS



## CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



### Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Two types are available:

**ODS:** An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

**OSS:** An integral stairwell occupancy sensor uses ultrasonic sensing technology to turn light on when movement is detected. The sensor, located in the middle of the fixture, transmits sound waves in the stairwell. When motion is detected in the space, the luminaire turns on to full brightness. When the space is unoccupied, light levels are dimmed to 50%. Please consult factory for other sensor locations on the luminaire, as well as for other minimum light level options.

### Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used. Consult factory for integrating connected controls in a wall fixture.

## CONSTRUCTION

**Housing:** Extruded aluminum

**Interior brackets:** Die-formed cold rolled sheet steel

**Joining system:** Die-cast zinc

**Reflectors:** Die-formed cold rolled steel, 95% reflective matte white painted

**Lens:** Acrylic

**Drop lens:** Extruded with glued end caps

**End caps:** Die-cast aluminum

## WEIGHT

| Direct/Indirect                 | Direct or Indirect              |
|---------------------------------|---------------------------------|
| <b>4':</b> 13.23 lbs - 6.0 kg   | <b>4':</b> 11.12 lbs - 5.05 kg  |
| <b>8':</b> 26.48 lbs - 12.0 kg  | <b>8':</b> 22.25 lbs - 10.1 kg  |
| <b>12':</b> 39.84 lbs - 18.0 kg | <b>12':</b> 33.48 lbs - 15.2 kg |

## CERTIFICATIONS

**ETL:** Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

**Declare:** [LBC Red List Approved](#)

## WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.