


# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO

SEALWERX SERIES

 **Lumenwerx**

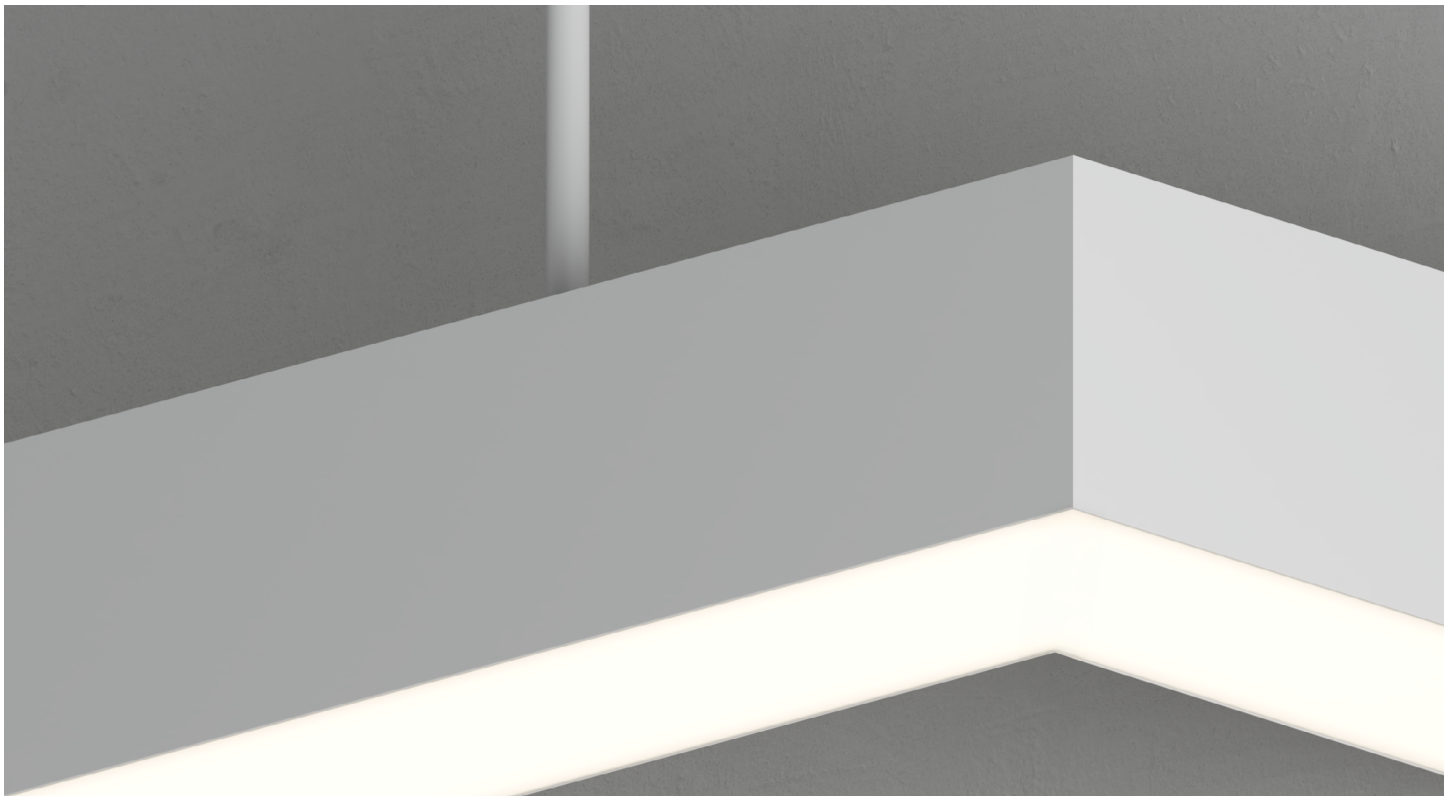

The Via Seal Collection is engineered for environments where performance is critical. Designed to withstand the harshest conditions, Via Seal fixtures feature ingress protection ratings from IP44 to IP66 and an impact protection rating of IK08. These luminaires provide robust defense against dust, water, and physical damage, all while maintaining the visual continuity and design flexibility of the sleek Via product line.

## IP RATINGS


IP66  
IP65  
IP65EC  
IP64  
IP54  
IP44

## LIGHT SOURCE

SOLA - Dim-to-Warm  
DUO - Tunable White

## UP TO

IK08



**SENSORS**  
For latest information on sensors, click [here](#).



Via Seal Brochure

# VIA 4 SEAL

PENDANT PATTERN  
CHROMAWERX - SOLA, DUO

SEALWERX SERIES



Project: \_\_\_\_\_  
Type: \_\_\_\_\_

## Order Guide

| LUMINAIRE ID                                    | DISTRIBUTION                                     | ENVIRONMENT <sup>1,2</sup>                                                                                                                                                                                                                                                                                                                                                                             | DIRECT OPTIC                                                                                                                                                                                                          | INDIRECT OPTIC<br>Specify NA for Direct fixture                                                                                                                                 | LIGHT SOURCE <sup>3</sup>                                                                                                                                                                                  | CRI                                              |
|-------------------------------------------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| <b>V4SEALPPAT</b>                               |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                       |                                                                                                                                                                                 |                                                                                                                                                                                                            |                                                  |
| <b>V4SEALPPAT</b> - Via 4" Seal Pendant Pattern | <b>D</b> - Direct<br><b>DI</b> - Direct/Indirect | <u>Direct:</u><br><b>IP66</b> - IP66-Rated<br><b>IP65EC</b> - IP65-Rated Electrical Components<br><b>IP64</b> - IP64-Rated<br><b>IP54</b> - IP54-Rated<br><b>IP44</b> - IP44-Rated<br><br><sup>1</sup> See page 5 to 6 for more information on the features and installation details for each environment option.<br><sup>2</sup> Fixture must be installed horizontally with direct lens facing down. | <u>Direct/Indirect:</u><br><b>IP65</b> - IP65-Rated<br><b>IP64</b> - IP64-Rated<br><b>IP44</b> - IP44-Rated<br><br><b>EPDO</b> - Environmentally Protected Direct Optic<br><b>ASDO</b> - Asymmetric Soft Direct Optic | <b>EPIO</b> - Environmentally Protected Indirect Optic<br><b>ASIO</b> - Asymmetric Soft Indirect Optic<br><b>WIO2</b> - Widespread Indirect Optic<br><b>NA</b> - Not applicable | <b>SOLA</b> - Dim-to-warm single channel control 35K to 22K<br><b>DUO</b> - Tunable white 2-channel control 65K to 27K<br><br><sup>3</sup> Static white and BIOS also available. Consult factory for RGBW. | <b>80CRI</b> - 80+ CRI<br><b>90CRI</b> - 90+ CRI |

| DIRECT LUMEN PACK.                                                                                                         | INDIRECT LUMEN PACK.<br>Specify NA for Direct fixture                                                                                                    | PATTERN LENGTH                                                                                                                                                                                                                                                                                                                                                                        | CORNER TYPE <sup>5</sup>                                                                                                                                                                                                                                                                                                                                      | VOLTAGE                                                            |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| <b>500LMF</b> - Low output 500 lm/ft<br><b>750LMF</b> - Medium output 750 lm/ft<br><b>1000LMF</b> - High output 1000 lm/ft | <b>500LMF</b> - Low output 500 lm/ft<br><b>750LMF</b> - Medium output 750 lm/ft<br><b>1000LMF</b> - High output 1000 lm/ft<br><b>NA</b> - Not applicable | <b>##FT##IN(##X##FT##IN-##X##FT##IN-...)</b> <sup>4</sup> -<br>##FT##IN: total nominal length of pattern in feet and/or inches<br>##X: quantity of each section<br>##FT##IN: nominal length of each section in feet and/or inches<br><br>Continuous runs: lengths over 12'<br><br><sup>4</sup> - Minimum 2' for Direct.<br>- Minimum 3' for Direct/Indirect.<br>- Minimum 4' for DMX. | <b>#LEV2C(A##)</b> - 2-way leveled corner<br><br><b>ANGLE (A##):</b><br><b>(A90)</b> - 90°<br><b>(A##)</b> <sup>6</sup> - Custom<br><br><sup>5</sup> Specify quantity (#) and angle (A##) for each required corner type. If more than one option is specified, separate codes with a "+", e.g. 1LEV2C(A90)+2LEV2C(A60).<br><sup>6</sup> Minimum angle is 45°. | <b>120V</b> - 120V<br><b>277V</b> - 277V<br><b>UNV</b> - 120V-277V |

| DRIVER <sup>7</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ELECTRICAL                         | POWER FEED                        | MOUNTING <sup>10</sup>                                                                                                                                                                                                        | FINISH                                                                                                                                                             | OPTION                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SOLA</b><br><b>SD1</b> - Single 0-10V input<br><br><b>DUO</b><br><b>DMX</b> <sup>8,9</sup> - DMX<br><b>DDA</b> <sup>9</sup> - DALI DT6<br><b>DDA8</b> <sup>9</sup> - DALI DT8<br><b>DD1</b> - Dual 0-10V input for CCT/intensity<br><b>LD2</b> <sup>9</sup> - Lutron DALI-2 digital<br><br><sup>7</sup> See page 5 to 6 for driver temperature ranges.<br><sup>8</sup> For more information, see pages 12 to 17.<br><sup>9</sup> On-site commissioning is required. | <b>1C</b><br><b>1C</b> - 1 circuit | <b>TF</b><br><b>TF</b> - Top feed | <b>STS</b> - Stem, standard<br><b>STC()</b> - Stem, custom<br><br><sup>10</sup> Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options. | <b>W</b> - Matte white<br><b>AL</b> - Aluminum<br><b>B</b> - Matte black<br><b>WA</b> - White antimicrobial Silverwerx<br><b>CF#</b> - Custom finish, specify RAL# | <b>CRF</b> <sup>11</sup> - Corrosion-resistant finish<br><b>NATA</b> <sup>11</sup> - Natatorium finish<br><b>MAR</b> <sup>11</sup> - Marine finish<br><b>NA</b> - None<br><br><sup>11</sup> Only available with IP66, IP65 and IP65EC environment options. |

## Accessories

Optional, order separately

| WALL CONTROLLER <sup>12</sup>                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DMX</b><br><br><b>WCW##FT</b> <sup>13</sup> - DMX wall controller white<br><b>WCB##FT</b> <sup>13</sup> - DMX wall controller black | <b>DD1</b><br><br><b>TWCW##FT</b> <sup>14,15</sup> - Dual 0-10V wall controller white<br><b>TWCB##FT</b> <sup>14,15</sup> - Dual 0-10V wall controller black<br><br><sup>12</sup> Specify wire length (##) in feet.<br><sup>13</sup> Available with DMX only. For more information, see pages 12 to 17, or consult factory.<br><sup>14</sup> Available with DD1 only. For more information, see page 18, or consult factory.<br><sup>15</sup> Only available with 120V. |

# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO



## SEALWERX SERIES

## Pendant Mounting Code

### Standard

For a standard mounting, please refer to the information below.

#### MOUNTING

##### STS - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable
- Power cord is black for black fixtures, and white for all other fixture finishes

### Custom

#### Stem

For a custom mounting, specify the options in the parentheses.

Example: STC(5NPC-36IN-W-STW-SLS)

#### MOUNTING

##### STC()

|     | NON-POWER CANOPY SIZE        | STEM LENGTH                                                                                                                                                            | CANOPY FINISH                                                                            | STEM COLOR                                                                                       | OPTION                                     |
|-----|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------|
| STC | 5NPC - Ø 5" non-power canopy | 18IN - 18"<br>36IN - 36"<br>#IN <sup>1</sup> - Specify length in inches<br><br><sup>1</sup> Minimum length is 6". Maximum length is 72". Stem is not field adjustable. | W - Matte white<br>AL - Aluminum<br>B - Matte black<br>CF# - Custom finish, specify RAL# | STW - Matte white<br>STAL - Aluminum<br>STB - Matte black<br>STCF# - Custom finish, specify RAL# | SLS - Sloped ceiling for stem<br>NA - None |

# VIA 4 SEAL

PENDANT PATTERN  
CHROMAWERX - SOLA, DUO

SEALWERX SERIES




## Pattern Layout

### CORNER TYPES


#### LEVELED CORNER



### EXAMPLES

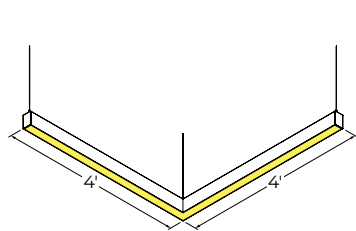


8FT(2X4FT)-1LEV2C(A90)




14FT(2X4FT-2X3FT)-4LEV2C(A90)

## Dimensions

### DIRECT



### DIRECT/INDIRECT










# VIA 4 SEAL

PENDANT PATTERN  
CHROMAWERX - SOLA, DUO



## SEALWERX SERIES

### Environment Options

| Direct                                                                                      |                                                                                     |                                                                                     |                                                                                     |                                                                                       |
|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| IP66                                                                                        | IP65EC<br>Electrical Components                                                     | IP64                                                                                | IP54                                                                                | IP44                                                                                  |
| Dust tight   High water resistance                                                          | Dust tight   Moderate water resistance                                              | Dust tight   Water splash resistance                                                | Dust protected   Water splash resistance                                            | Particles larger than 1mm protected   Water splash resistance                         |
| Directly exposed to the elements                                                            | Moderate exposure to the elements                                                   | OUTDOOR<br>Under canopy, slightly exposed                                           |                                                                                     | Under canopy, not exposed                                                             |
| Wipe down application<br>Healthcare application<br>Cleanroom application                    | INDOOR<br>Wipe down application<br>Healthcare application                           |                                                                                     |                                                                                     |                                                                                       |
|           |                                                                                     |  |                                                                                     |                                                                                       |
| External joiner gasket every 12'                                                            | Continuous line of light over 12'                                                   | External joiner gasket every 12'                                                    | Internal joiner gasket with soft shadow line every 12'                              | Continuous line of light over 12'                                                     |
|          |  |  |  |  |
| <b>Driver:</b> in a sealed enclosure<br><b>Electrical connections:</b> water and dust proof |                                                                                     |                                                                                     |                                                                                     |                                                                                       |
| <b>LED boards:</b> conformal coated for maximum protection                                  |                                                                                     |                                                                                     |                                                                                     |                                                                                       |
| <b>Protective finish options:</b> Corrosion-resistant, Natatorium and Marine                |                                                                                     |                                                                                     |                                                                                     |                                                                                       |

### Ambient Temperature Range based on driver selection

|                      | LD2          | SD1 / DMX / DDA / DDA8 | DD1             |
|----------------------|--------------|------------------------|-----------------|
| Minimum temperature: | 0 °C / 32 °F | -20 °C / -4 °F         | -25 °C / -13 °F |
| Maximum temperature: |              | 40 °C / 104 °F         |                 |

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9  
T (514) 225-4304 F (514) 931-4862  
[www.Lumenwerx.com](http://www.Lumenwerx.com)



Lumenwerx reserves the right to modify product specifications without notification.  
© Lumenwerx, ULC. All rights reserved.  
VIA4SEAL-PAT-PENDANT-TW-SPEC-REV7 January 27, 2026

# VIA 4 SEAL





PENDANT PATTERN

CHROMAWERX - SOLA, DUO

SEALWERX SERIES



## Environment Options

| Direct/Indirect                                                                     |                           |                                                           |                                                                                     |                                     |                         |
|-------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|-------------------------|
| IP65                                                                                |                           | IP64                                                      |                                                                                     | IP44                                |                         |
| Dust tight                                                                          | Moderate water resistance | Dust tight                                                | Water splash resistance                                                             | Particles larger than 1mm protected | Water splash resistance |
| Moderate exposure to the elements                                                   |                           | OUTDOOR<br>Under canopy, slightly exposed                 |                                                                                     | Under canopy, not exposed           |                         |
| Wipe down application<br>Healthcare application<br>Cleanroom application            |                           | INDOOR<br>Wipe down application<br>Healthcare application |                                                                                     |                                     |                         |
|   |                           |                                                           |   |                                     |                         |
| External joiner gasket every 12'                                                    |                           |                                                           | Continuous line of light over 12'                                                   |                                     |                         |
|  |                           |                                                           |  |                                     |                         |
| Driver: in a sealed enclosure<br>Electrical connections: water and dust proof       |                           |                                                           |                                                                                     |                                     |                         |
| LED boards: conformal coated for maximum protection                                 |                           |                                                           |                                                                                     |                                     |                         |
| Protective finish options:<br>Corrosion-resistant,<br>Natatorium and Marine         |                           |                                                           |                                                                                     |                                     |                         |

## Ambient Temperature Range

based on driver selection

|                      | LD2            | SD1 / DMX / DDA / DDA8 | DD1             |
|----------------------|----------------|------------------------|-----------------|
| Minimum temperature: | 0 °C / 32 °F   | -20 °C / -4 °F         | -25 °C / -13 °F |
| Maximum temperature: | 40 °C / 104 °F |                        |                 |

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9  
 T (514) 225-4304 F (514) 931-4862  
[www.Lumenwerx.com](http://www.Lumenwerx.com)



Lumenwerx reserves the right to modify product specifications without notification.  
 © Lumenwerx, ULC. All rights reserved.  
 VIA4SEAL-PAT-PENDANT-TW-SPEC-REV7 January 27, 2026

# VIA 4 SEAL

PENDANT PATTERN  
CHROMAWERX - SOLA, DUO



## SEALWERX SERIES



### Photometrics

Values calculated based on a 4' fixture at 3500K for all optics.

#### DIRECT

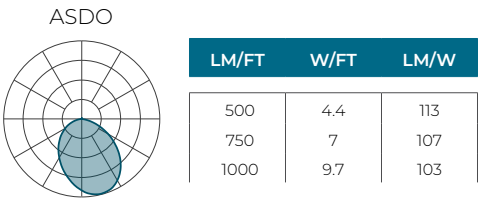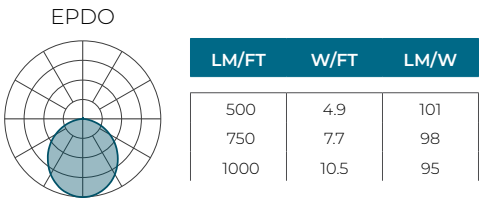

#### MULTIPLIERS

Use this table to get results for different color temperatures for all photometric tables.

##### SOLA

| CCT   | WATTS<br>80+ CRI / 90+ CRI | LPW<br>80+ CRI / 90+ CRI |
|-------|----------------------------|--------------------------|
| 3500K | 1.00                       | 1.00                     |

##### DUO

| CCT   | WATTS<br>80+ CRI / 90+ CRI | LPW<br>80+ CRI / 90+ CRI |
|-------|----------------------------|--------------------------|
| 2700K | 1.05                       | 0.95                     |
| 6500K | 1.00                       | 1.00                     |

# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO




## SEALWERX SERIES

## Photometrics


Values calculated based on a 4' fixture at 3500K for all optics.

### DIRECT/INDIRECT




EPDO - EPIO

|      |      | LM/FT | TOTAL | W/FT  | LM/W |
|------|------|-------|-------|-------|------|
|      |      | D     | I     | LM/FT |      |
| EPDO | EPIO |       |       |       |      |
| 500  | 500  |       | 1000  | 10.1  | 99   |
|      | 750  |       | 1250  | 13.2  | 95   |
|      | 1000 |       | 1500  | 16.3  | 92   |
| 750  | 500  |       | 1250  | 12.9  | 97   |
|      | 750  |       | 1500  | 15.8  | 95   |
|      | 1000 |       | 1750  | 19.0  | 92   |
| 1000 | 500  |       | 1500  | 15.8  | 95   |
|      | 750  |       | 1750  | 18.8  | 93   |
|      | 1000 |       | 2000  | 22.0  | 91   |




EPDO - ASIO

|      |      | LM/FT | TOTAL | W/FT  | LM/W |
|------|------|-------|-------|-------|------|
|      |      | D     | I     | LM/FT |      |
| EPDO | ASIO |       |       |       |      |
| 500  | 500  |       | 1000  | 9.2   | 109  |
|      | 750  |       | 1250  | 11.6  | 108  |
|      | 1000 |       | 1500  | 14.2  | 106  |
| 750  | 500  |       | 1250  | 11.9  | 105  |
|      | 750  |       | 1500  | 14.3  | 105  |
|      | 1000 |       | 1750  | 16.8  | 104  |
| 1000 | 500  |       | 1500  | 14.9  | 101  |
|      | 750  |       | 1750  | 17.2  | 102  |
|      | 1000 |       | 2000  | 19.8  | 101  |




EPDO - WIO2

|      |      | LM/FT | TOTAL | W/FT  | LM/W |
|------|------|-------|-------|-------|------|
|      |      | D     | I     | LM/FT |      |
| EPDO | WIO2 |       |       |       |      |
| 500  | 500  |       | 1000  | 9.1   | 110  |
|      | 750  |       | 1250  | 11.5  | 109  |
|      | 1000 |       | 1500  | 14.0  | 107  |
| 750  | 500  |       | 1250  | 11.8  | 106  |
|      | 750  |       | 1500  | 14.2  | 106  |
|      | 1000 |       | 1750  | 16.7  | 105  |
| 1000 | 500  |       | 1500  | 14.7  | 102  |
|      | 750  |       | 1750  | 17.2  | 102  |
|      | 1000 |       | 2000  | 19.6  | 102  |




ASDO - EPIO

|      |      | LM/FT | TOTAL | W/FT  | LM/W |
|------|------|-------|-------|-------|------|
|      |      | D     | I     | LM/FT |      |
| ASDO | EPIO |       |       |       |      |
| 500  | 500  |       | 1000  | 9.6   | 104  |
|      | 750  |       | 1250  | 12.6  | 99   |
|      | 1000 |       | 1500  | 15.8  | 95   |
| 750  | 500  |       | 1250  | 12.1  | 103  |
|      | 750  |       | 1500  | 15.2  | 99   |
|      | 1000 |       | 1750  | 18.4  | 95   |
| 1000 | 500  |       | 1500  | 14.9  | 101  |
|      | 750  |       | 1750  | 17.9  | 98   |
|      | 1000 |       | 2000  | 21.3  | 94   |



ASDO - ASIO

|      |      | LM/FT | TOTAL | W/FT  | LM/W |
|------|------|-------|-------|-------|------|
|      |      | D     | I     | LM/FT |      |
| ASDO | ASIO |       |       |       |      |
| 500  | 500  |       | 1000  | 8.6   | 116  |
|      | 750  |       | 1250  | 11.1  | 113  |
|      | 1000 |       | 1500  | 13.6  | 110  |
| 750  | 500  |       | 1250  | 11.2  | 112  |
|      | 750  |       | 1500  | 13.6  | 110  |
|      | 1000 |       | 1750  | 16.2  | 108  |
| 1000 | 500  |       | 1500  | 14.0  | 107  |
|      | 750  |       | 1750  | 16.4  | 107  |
|      | 1000 |       | 2000  | 18.9  | 106  |



ASDO - WIO2

|      |      | LM/FT | TOTAL | W/FT  | LM/W |
|------|------|-------|-------|-------|------|
|      |      | D     | I     | LM/FT |      |
| ASDO | WIO2 |       |       |       |      |
| 500  | 500  |       | 1000  | 8.5   | 117  |
|      | 750  |       | 1250  | 11.0  | 114  |
|      | 1000 |       | 1500  | 13.5  | 111  |
| 750  | 500  |       | 1250  | 11.2  | 112  |
|      | 750  |       | 1500  | 13.5  | 111  |
|      | 1000 |       | 1750  | 16.1  | 109  |
| 1000 | 500  |       | 1500  | 13.9  | 108  |
|      | 750  |       | 1750  | 16.2  | 108  |
|      | 1000 |       | 2000  | 18.9  | 106  |

### MULTIPLIERS

Use this table to get results for different color temperatures for all photometric tables.

#### SOLA

| CCT   | WATTS             | LPW               |
|-------|-------------------|-------------------|
|       | 80+ CRI / 90+ CRI | 80+ CRI / 90+ CRI |
| 3500K | 1.00              | 1.00              |

#### DUO

| CCT   | WATTS             | LPW               |
|-------|-------------------|-------------------|
|       | 80+ CRI / 90+ CRI | 80+ CRI / 90+ CRI |
| 2700K | 1.05              | 0.95              |
| 6500K | 1.00              | 1.00              |

# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO

SEALWERX SERIES



## Technical Specifications

### DIRECT OPTICS

#### Environmentally Protected Direct Optic (EPDO)

The Environmentally Protected Direct Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. This extruded snap-in lens has a gasket to ensure proper sealing. The lens is 1/16" thick and made of frosted polycarbonate. Internally, white, side kicking reflectors guide the light through the lens. The EPDO suits moderate climate environments.

#### Asymmetric Soft Direct Optic (ASDO)

The Asymmetric Soft Direct Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. This extruded snap-in lens has a gasket to ensure proper sealing. The lens is 1/16" thick and made of frosted polycarbonate. Internally, white, side kicking reflectors specifically angled to guide the light through the lens to create a nice asymmetric distribution. The ASDO suits moderate climate environments.

### INDIRECT OPTICS

#### Environmentally Protected Indirect Optic (EPIO)

The Environmentally Protected Indirect Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. The lens is 1/16" thick and made of frosted polycarbonate. This extruded snap-in lens has a gasket to ensure proper sealing. The EPIO suits moderate climate environments.

#### Asymmetric Soft Indirect Optic (ASIO)

The Asymmetric Soft Indirect Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. The lens is 1/16" thick and made of clear polycarbonate. This extruded snap-in lens has a gasket to ensure proper sealing. The total internal reflection and surface scattering optic is specifically angled to guide the light through the lens to create a nice asymmetric distribution. The ASIO suits moderate climate environments.

#### Widespread Indirect Optic (WIO2)

The Widespread Indirect Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. The lens is 1/16" thick and made of clear polycarbonate. This extruded snap-in lens has a gasket to ensure proper sealing. The total internal reflection and surface scattering optic offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1. The WIO2 suits moderate climate environments.

#### Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height

| Mounting height from ceiling | Spacing (Center to center) |     |     |
|------------------------------|----------------------------|-----|-----|
|                              | 8'                         | 10' | 12' |
| 24"                          | 3.0                        | 5.5 | 8.0 |
| 36"                          | 2.0                        | 3.0 | 4.5 |
| 48"                          | 2.0                        | 2.0 | 3.5 |

### LIGHT SOURCE

Custom linear array of alternating color temperature mid-flux LEDs are mounted directly to the housing for optimal thermal performance. For the DUO products, a color temperature range from 6500K-2700K is achievable with color points on or below the black body curve. For the SOLA products, a color temperature range from 3500K-2200K is controlled synchronously with intensity. Color consistency between fixtures is maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

#### Chromawerx SOLA

It is a single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable but the default option runs from 3500K at 100% of full power to 2200K at 5% of full power. CRI is maintained above 80 throughout the dimming range.

# VIA 4 SEAL


PENDANT PATTERN

CHROMAWERX - SOLA, DUO

## SEALWERX SERIES

### Chromawerx DUO

It is a two-channel control. It uses an analog (0-10V) protocol for separate control of luminaire CCT and intensity or a digital (DMX, DALI, and LD2) protocol for synchronous control of both warm and cool LED arrays to enable the user to set color temperature and light output. Commonly called "tunable white", Chromawerx two-channel control provides the range of cool (6500K) to warm (2700K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. CRI is maintained above 80. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

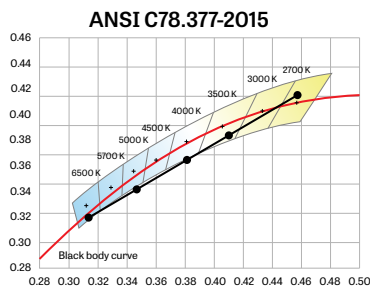

### WELL BUILDING STANDARD



**WELL for Light:** The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when DUO is selected
- Feature 55 or L04 meets WELL glare category (c-d) (not applicable with 1000 lm/ft)
- Feature 58 or L07 when 90+ CRI is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5% or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



**WELL for Mind:** This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

For more information, please contact [well@lumenwerx.com](mailto:well@lumenwerx.com)

### PATTERN LENGTH

Via 4 Seal can be ordered in 1' and/or 1" increments. Continuous runs are available for run lengths over 12'. The minimum length is 2' for Direct fixtures, and 3' for Direct/Indirect fixtures. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx joiner kits are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

### WEEP HOLES

The Direct/Indirect fixtures, with the IP44-Rated option, feature a weep hole situated in the end cap. Water and moisture that enters the fixture will be expelled through this hole.



### TEMPERATURE VARIATION PROTECTION

Fixtures with the IP66-Rated, IP65-Rated, IP65-Rated Electrical Components and IP64-Rated environment options feature an integrated pressure equalization and moisture control GORE® protective vent. It allows air to flow while blocking water, dust, and contaminants. It also reduces internal condensation, supports thermal stability, and preserves the fixture's sealed performance over time.



Location may vary.

### ELECTRICAL

#### SOLA

#### SD1

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Using a single 0-10V control signal, the light output warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

Lumenwerx reserves the right to modify product specifications without notification.  
© Lumenwerx, ULC. All rights reserved.  
VIA4SEAL-PAT-PENDANT-TW-SPEC-REV7 January 27, 2026

# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO



## SEALWERX SERIES

### DUO

#### DMX

Factory-set adjustable output current electronic driver with 120-277 VAC line input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, both channels of LEDs are independently adjustable. Each DMX driver can be independently addressed using the built-in RDM (Remote Device Management) in the field. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

#### DALI

Factory-set adjustable output current electronic driver with 120-277 VAC line input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. With DALI Type 6, two DALI addresses are required to control both channels. With DALI Type 8, one DALI address is required to control both channels. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

#### DD1

Factory-set adjustable output current LED driver with universal (120-277 VAC) input. Controlled via two individual 0-10V signals, one for setting light output down to a minimum of 1% and the other for adjusting the CCT (default range of 6500K-2700K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

#### LD2

Lutron DALI-2 digital drivers provide a high-performance tunable white solution with single-address digital control. Guaranteed performance and compatibility when used with Lutron DALI-2 controls.

### PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

### MOUNTING

Pendant fixtures can be mounted with stem. See page 3 for details. Additional bracing by others required for wind and earthquake exposure.

### FINISH

**Interior:** 95%, reflective matte powder coated white paint

**Exterior:** Powder-coat paint in matte white, matte black, or aluminum. Custom finishes are also available. Optional antimicrobial finish.

### FINISH OPTIONS

**Corrosion-resistant:** General protection from moisture, humidity, cleaners, and mild chemicals

**Natatorium:** Protection from chlorine vapour, high humidity, and condensation

**Marine:** Protection from salt spray, air, and UV

### CONSTRUCTION

**Housing:** Extruded aluminum, up to 90% recycled content

**Interior brackets:** Die-formed cold rolled sheet steel

**Gaskets:** Closed-cell silicone foam

**Reflectors:** Die-formed cold rolled sheet steel, 95% reflective matte white painted

**End cap:** Die-cast aluminum

### CERTIFICATIONS

**ETL:** IP44-Rated environment option is rated for dry/damp locations. IP66-Rated, IP65-Rated, IP65-Rated Electrical Components, IP64-Rated and IP54-Rated environment options are ETL Wet Listed. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. During the installation of Wet Listed fixtures, the contractor is responsible for properly sealing all mounting and electrical connection points.

**IK08:** Impact resistance rated to IK08

### WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

Wall controllers are covered by the manufacturer warranty.

# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO

SEALWERX SERIES

 **Lumenwerx**

## DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX controller supplied by Lumenwerx

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

### How many zones do you have?

A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

### How to calculate the required number of drivers:

per 4' fixture

Driver

1x driver

Direct only

per 4' fixture

Driver

Driver

2x driver

Direct high output

To Calculate  
# of drivers

1 - 4 Zones

5 or more Zones

Do you have more than  
32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller.

#### WALL CONTROLLER

**WCW** - wall controller white

**WCB** - wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

# VIA 4 SEAL


PENDANT PATTERN

CHROMAWERX - SOLA, DUO

SEALWERX SERIES

Lumenwerx

## GENERIC DMX NETWORK ARCHITECTURE

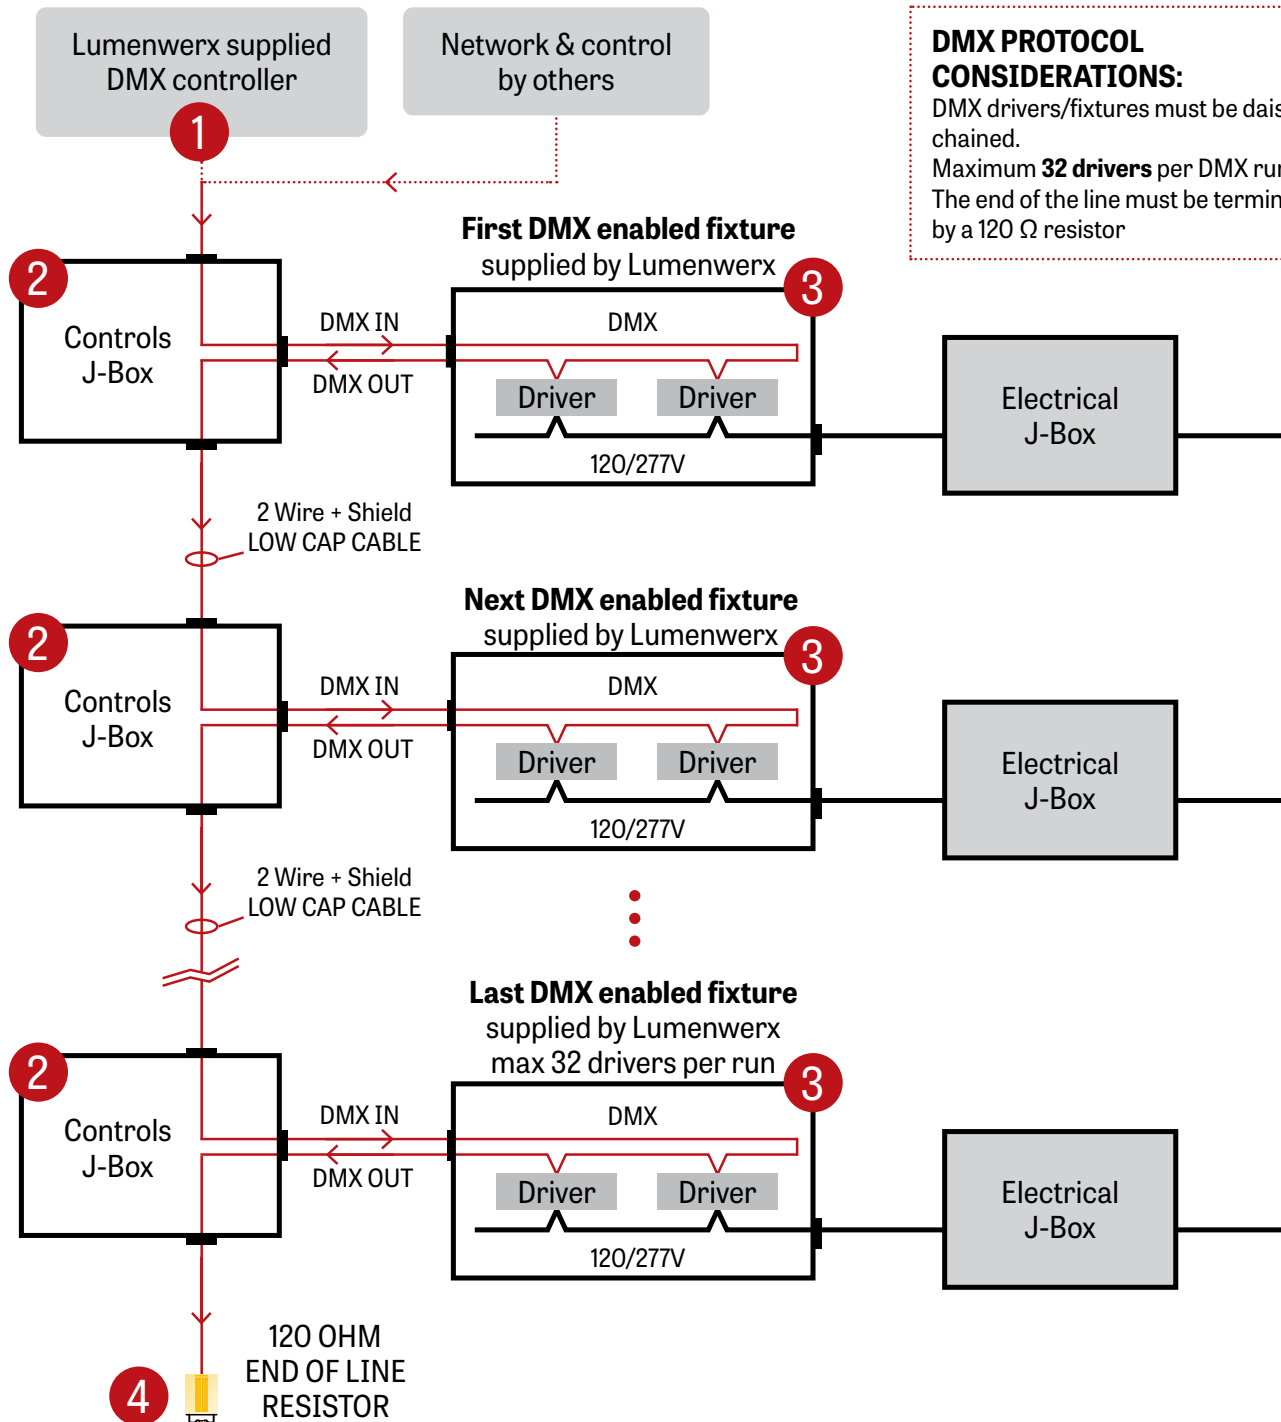

# VIA 4 SEAL

PENDANT PATTERN

CHROMAWERX - SOLA, DUO

SEALWERX SERIES





## 1 LUMENWERX SUPPLIED DMX CONTROLLER

To the first fixture

2 Wire +  
Shield Low Cap Cable

WALL BOX SUPPLIED BY OTHERS

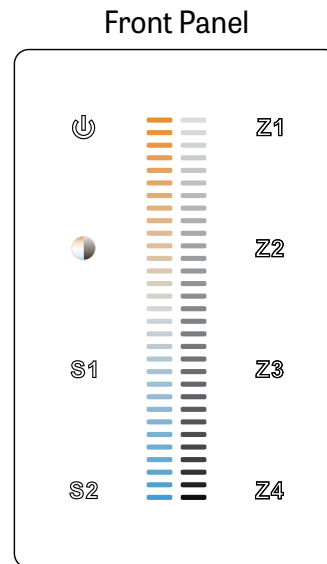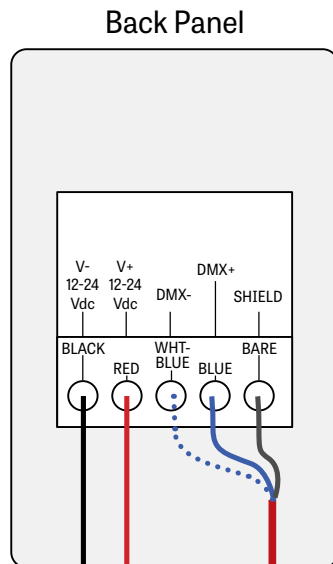


Controller image may differ

I.E.: Cerco Cable 7539-10  
Belden 9841  
Belden 8241

DC out

Power Supply  
120-277VAC / 24VDC

N  
L

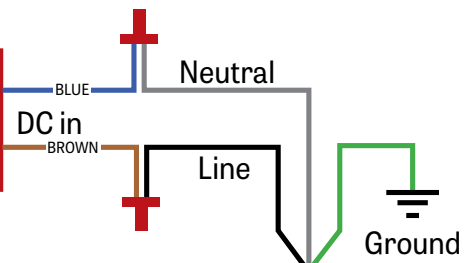

Electrical  
J-Box

# VIA 4 SEAL

PENDANT PATTERN


CHROMAWERX - SOLA, DUO

SEALWERX SERIES

Lumenwerx


## 2 J-BOX DMX DAISY CHAIN DETAIL

Low capacitance DMX Cable from Previous Fixture

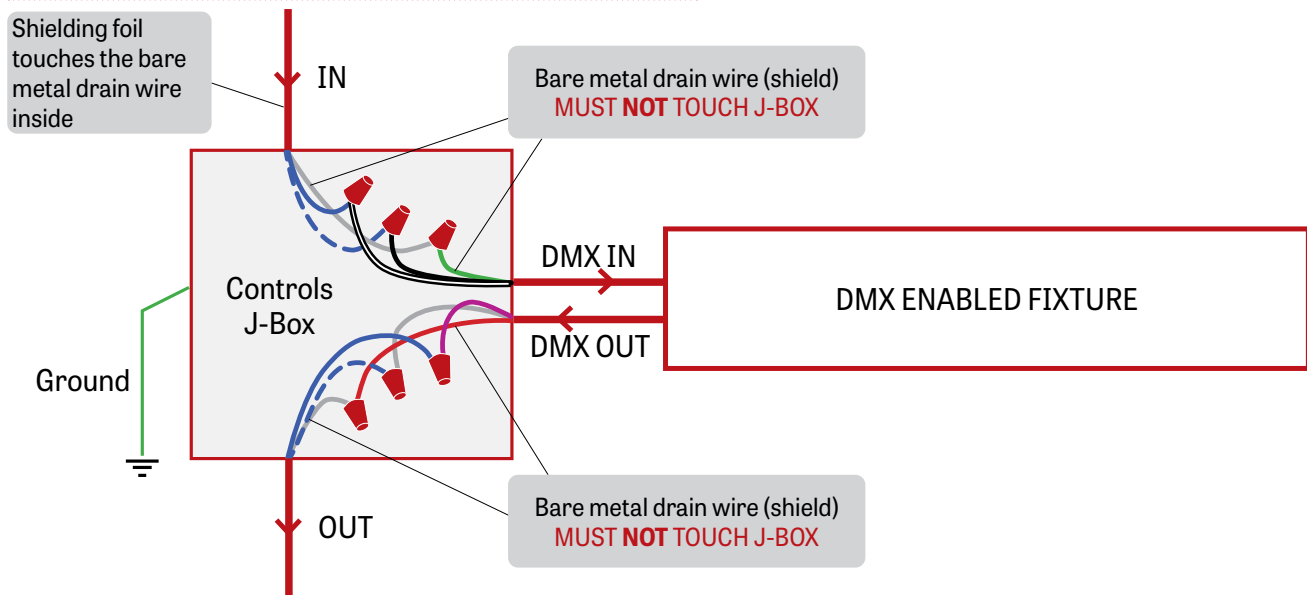

Low capacitance DMX cable to next fixture

## 3 DMX CONNECTION PENDANT & WALL

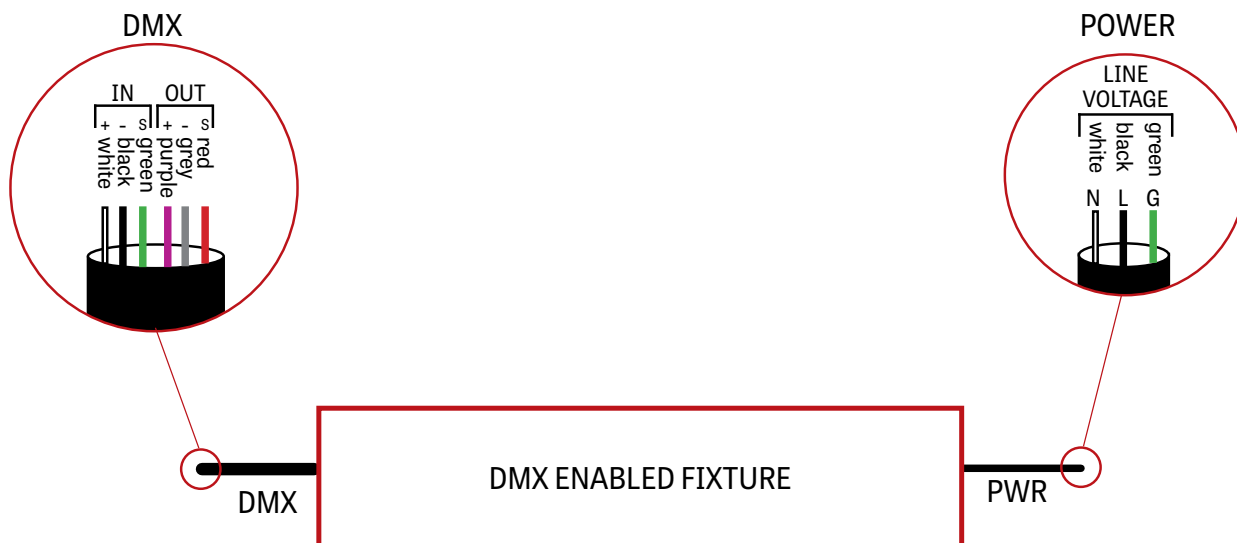

# VIA 4 SEAL

PENDANT PATTERN


CHROMAWERX - SOLA, DUO

SEALWERX SERIES



4

## DMX LAST FIXTURE DETAIL

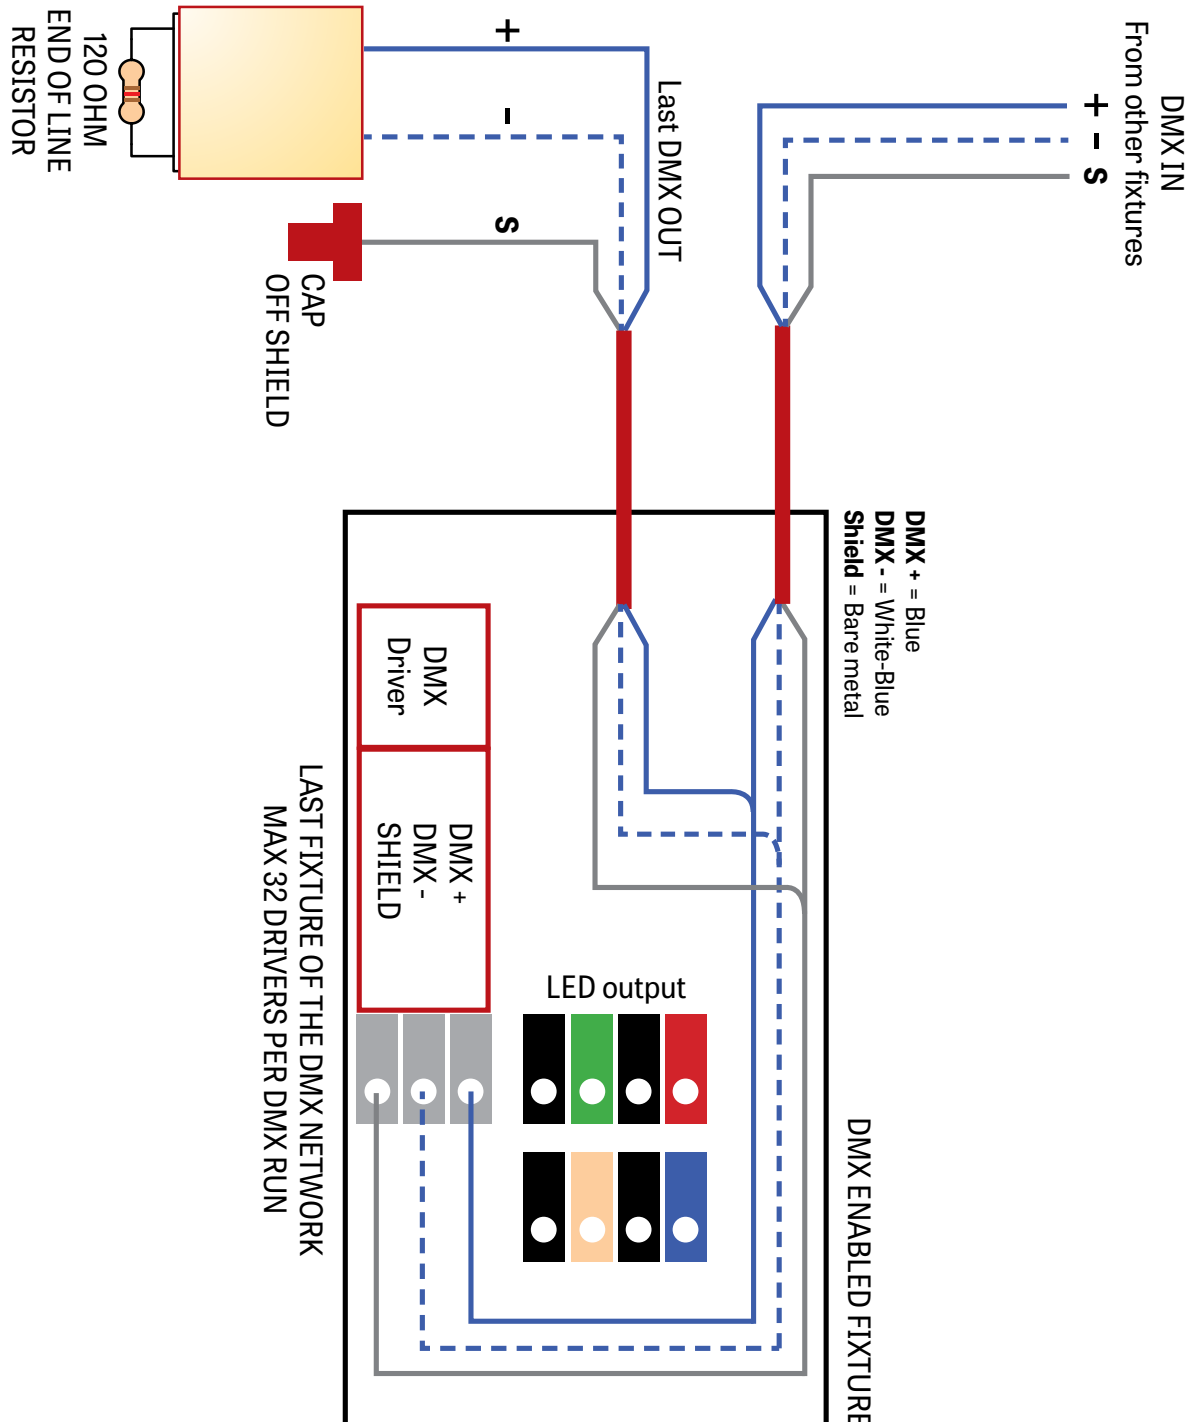

# VIA 4 SEAL

PENDANT PATTERN


CHROMAWERX - SOLA, DUO

SEALWERX SERIES

 **Lumenwerx**

## DMX WALL CONTROLLER

### DUO 1-4 ZONE

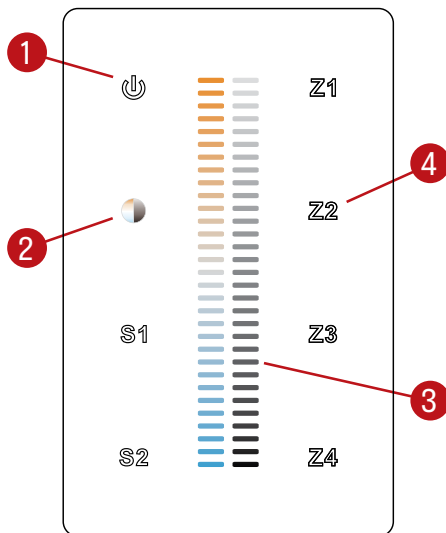

(1) Power:

Use this button to turn ON or OFF the fixture.

(2) Brightness/CCT:

Use the color/brightness toggle button to choose between color/brightness. When Blue: brightness is selected, when Yellow: color is selected.

(3) Slider:

Depending on the mode chosen in step 2, the slider will allow the user to set desired color or brightness.

(4) Zone select:

Up to 4 zones can be selected either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

### Default DMX Addresses:

**1 Warm**

**2 Cool**

# VIA 4 SEAL

PENDANT PATTERN


CHROMAWERX - SOLA, DUO

SEALWERX SERIES

Lumenwerx


## DUAL 0-10V WALL CONTROLLER

### Front Panel

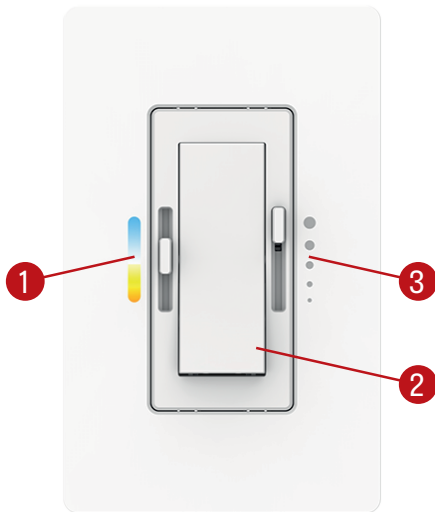

Controller image may differ

### Dimensions

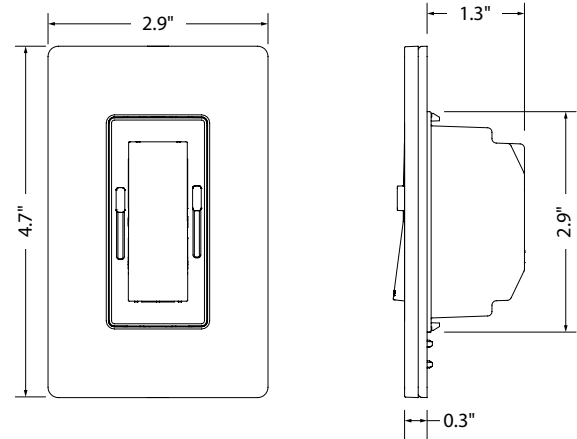

- (1) CCT control: Use this button to adjust the color temperature.
- (2) On/Off switch: Use this button to turn ON or OFF the fixture.
- (3) Dimming control: Use this button to adjust the brightness.

### Wiring Diagram

